

UTILITY APPLICATION

UNDER 37 CFR § 1.53(B)


TITLE: SUBCUTANEOUS ELECTRODE FOR  
TRANSTHORACIC CONDUCTION WITH HIGHLY  
MANEUVERABLE INSERTION TOOL

APPLICANT(S): GUST H. BARDY, M.D.; RICCARDO CAPPATO,  
M.D.; WILLIAM J. RISSMANN; GARY H.  
SANDERS

Correspondence Enclosed:

Utility Application Transmittal Sheet and FY 2001  
Fee Transmittal Sheet (2 pgs); Specification  
(192 pgs); Claims (44 pgs); Drawings (72 pgs);  
Abstract (1 pg); and Return Postcard

"EXPRESS MAIL" Mailing Label Number EL573394948US Date of Deposit August 27, 2001 I  
hereby certify under 37 CFR §1.10 that this correspondence is being deposited with the United  
States Postal Service as "Express Mail Post Office to Addressee" with sufficient postage on the  
date indicated above and is addressed to the Commissioner for Patents, Washington, D.C. 20231.

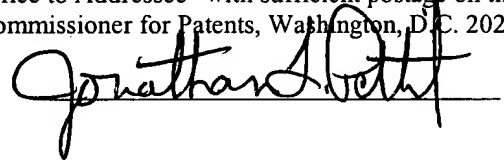

10/23/01 95504650

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

099403556-082701

**Subcutaneous Electrode for Transthoracic Conduction  
with Highly Maneuverable Insertion Tool**

Inventors:

Gust H. Bardy

Riccardo Cappato

William J. Rissmann

Gary H. Sanders

032580.0023

Field of the Invention

The present invention relates to an apparatus and method for performing electrical cardioversion/defibrillation and optional pacing of the heart via a totally subcutaneous non-transvenous system.

CROSS-REFERENCE TO RELATED APPLICATIONS

10 The present application is a continuation-in-part of U.S. patent application entitled "SUBCUTANEOUS ONLY IMPLANTABLE CARDIOVERTER-DEFIBRILLATOR AND OPTIONAL PACER," having Serial No. 09/663,606, filed September 18, 2000, pending, and U.S. patent application entitled "UNITARY SUBCUTANEOUS ONLY IMPLANTABLE CARDIOVERTER-DEFIBRILLATOR AND OPTIONAL PACER," having Serial No. 09/663,607, filed September 18, 2000, pending, of which both applications are assigned to the assignee of the present application, and the disclosures of both applications are hereby incorporated by reference.

20 In addition, the present application is filed concurrently herewith U.S. patent application entitled "DUCKBILL-SHAPED IMPLANTABLE CARDIOVERTER-DEFIBRILLATOR AND METHOD OF USE," U.S. patent application entitled "CERAMICS AND/OR OTHER MATERIAL INSULATED SHELL FOR ACTIVE AND NON-ACTIVE S-ICD CAN," U.S. patent application entitled "SUBCUTANEOUS ELECTRODE FOR



TRANSTHORACIC CONDUCTION WITH IMPROVED INSTALLATION  
CHARACTERISTICS," U.S. patent application entitled "SUBCUTANEOUS  
ELECTRODE WITH IMPROVED CONTACT SHAPE FOR TRANSTHORACIC  
CONDUCTION," U.S. patent application entitled "SUBCUTANEOUS  
5 ELECTRODE FOR TRANSTHORACIC CONDUCTION WITH LOW-PROFILE  
INSTALLATION APPENDAGE AND METHOD OF DOING SAME," U.S. patent  
application entitled "SUBCUTANEOUS ELECTRODE FOR TRANSTHORACIC  
CONDUCTION WITH INSERTION TOOL," U.S. patent application  
entitled "METHOD OF INSERTION AND IMPLANTATION FOR IMPLANTABLE  
10 CARDIOVERTER-DEFIBRILLATOR CANISTERS," U.S. patent application  
entitled "CANISTER DESIGNS FOR IMPLANTABLE CARDIOVERTER-  
DEFIBRILLATORS," U.S. patent application entitled "RADIANT CURVED  
IMPLANTABLE CARDIOVERTER-DEFIBRILLATOR CANISTER," U.S. patent  
application entitled "CARDIOVERTER-DEFIBRILLATOR HAVING A  
15 FOCUSED SHOCKING AREA AND ORIENTATION THEREOF," U.S. patent  
application entitled "BIPHASIC WAVEFORM FOR ANTI-BRADYCARDIA  
PACING FOR A SUBCUTANEOUS IMPLANTABLE CARDIOVERTER-  
DEFIBRILLATOR," U.S. patent application entitled "BIPHASIC  
WAVEFORM FOR ANTI-TACHYCARDIA PACING FOR A SUBCUTANEOUS  
20 IMPLANTABLE CARDIOVERTER-DEFIBRILLATOR," and U.S. patent  
application entitled "POWER SUPPLY FOR A SUBCUTANEOUS  
IMPLANTABLE CARDIOVERTER-DEFIBRILLATOR," the disclosures of  
which applications are hereby incorporated by reference.

BACKGROUND OF THE INVENTION

Defibrillation/cardioversion is a technique employed to counter arrhythmic heart conditions including some tachycardias in the atria and/or ventricles. Typically, electrodes are employed to stimulate the heart with electrical impulses or shocks, of a magnitude substantially greater than pulses used in cardiac pacing.

Defibrillation/cardioversion systems include body implantable electrodes and are referred to as implantable cardioverter/defibrillators (ICDs). Such electrodes can be in the form of patches applied directly to epicardial tissue, or at the distal end regions of intravascular catheters, inserted into a selected cardiac chamber. U.S. Pat. Nos. 4,603,705, 4,693,253, 4,944,300, 5,105,810, the disclosures of which are all incorporated herein by reference, disclose intravascular or transvenous electrodes, employed either alone or in combination with an epicardial patch electrode. Compliant epicardial defibrillator electrodes are disclosed in U.S. Pat. Nos. 4,567,900 and 5,618,287, the disclosures of which are incorporated herein by reference. A sensing epicardial electrode configuration is disclosed in U.S. Pat No. 5,476,503, the disclosure of which is incorporated herein by reference.

In addition to epicardial and transvenous electrodes, subcutaneous electrode systems have also been developed. For example, U.S. Patent Nos. 5,342,407 and 5,603,732, the disclosures of which are incorporated herein by reference, teach the use of a pulse monitor/generator surgically implanted into the abdomen and subcutaneous electrodes implanted in the thorax. This system is far more complicated to use than current ICD systems using transvenous lead systems together with an active can electrode and therefore it has no practical use. It has in fact never been used because of the surgical difficulty of applying such a device (3 incisions), the impractical abdominal location of the generator and the electrically poor sensing and defibrillation aspects of such a system.

Recent efforts to improve the efficiency of ICDs have led manufacturers to produce ICDs which are small enough to be implanted in the pectoral region. In addition, advances in circuit design have enabled the housing of the ICD to form a subcutaneous electrode. Some examples of ICDs in which the housing of the ICD serves as an optional additional electrode are described in U.S. Pat. Nos. 5,133,353, 5,261,400, 5,620,477, and 5,658,321 the disclosures of which are incorporated herein by reference.

ICDs are now an established therapy for the management of life threatening cardiac rhythm disorders, primarily

ventricular fibrillation (V-Fib). ICDs are very effective at treating V-Fib, but are therapies that still require significant surgery.

As ICD therapy becomes more prophylactic in nature and used in progressively less ill individuals, especially children at risk of cardiac arrest, the requirement of ICD therapy to use intravenous catheters and transvenous leads is an impediment to very long term management as most individuals will begin to develop complications related to lead system malfunction sometime in the 5-10 year time frame, often earlier. In addition, chronic transvenous lead systems, their reimplantation and removals, can damage major cardiovascular venous systems and the tricuspid valve, as well as result in life threatening perforations of the great vessels and heart. Consequently, use of transvenous lead systems, despite their many advantages, are not without their chronic patient management limitations in those with life expectancies of >5 years. The problem of lead complications is even greater in children where body growth can substantially alter transvenous lead function and lead to additional cardiovascular problems and revisions. Moreover, transvenous ICD systems also increase cost and require specialized interventional rooms and equipment as well as special skill for insertion. These systems are typically

implanted by cardiac electrophysiologists who have had a great deal of extra training.

In addition to the background related to ICD therapy, the present invention requires a brief understanding of automatic external defibrillator (AED) therapy. AEDs employ the use of cutaneous patch electrodes to effect defibrillation under the direction of a bystander user who treats the patient suffering from V-Fib. AEDs can be as effective as an ICD if applied to the victim promptly within 2 to 3 minutes.

AED therapy has great appeal as a tool for diminishing the risk of death in public venues such as in air flight. However, an AED must be used by another individual, not the person suffering from the potential fatal rhythm. It is more of a public health tool than a patient-specific tool like an ICD. Because >75% of cardiac arrests occur in the home, and over half occur in the bedroom, patients at risk of cardiac arrest are often alone or asleep and can not be helped in time with an AED. Moreover, its success depends to a reasonable degree on an acceptable level of skill and calm by the bystander user.

What is needed therefore, especially for children and for prophylactic long term use, is a combination of the two forms of therapy which would provide prompt and near-certain defibrillation, like an ICD, but without the long-term adverse sequelae of a transvenous lead system while simultaneously using

most of the simpler and lower cost technology of an AED. What is also needed is a cardioverter/defibrillator that is of simple design and can be comfortably implanted in a patient for many years.

5

#### SUMMARY OF THE INVENTION

One embodiment of the present invention provides a lead electrode assembly for subcutaneous implantation including an electrode; at least two channel guides coupled to the electrode for positioning the lead electrode assembly.

09940335-062701  
T02290-95E04660

#### BRIEF DESCRIPTION OF THE DRAWINGS

For a better understanding of the invention, reference is now made to the drawings where like numerals represent similar objects throughout the figures where:

FIG. 1 is a schematic view of a Subcutaneous ICD (S-ICD) of the present invention;

FIG. 2 is a schematic view of an alternate embodiment of a subcutaneous electrode of the present invention;

FIG. 3 is a schematic view of an alternate embodiment of a subcutaneous electrode of the present invention;

FIG. 4 is a schematic view of the S-ICD and lead of FIG. 1 subcutaneously implanted in the thorax of a patient;

FIG. 5 is a schematic view of the S-ICD and lead of FIG. 2 subcutaneously implanted in an alternate location within the thorax of a patient;

FIG. 6 is a schematic view of the S-ICD and lead of FIG. 3 subcutaneously implanted in the thorax of a patient;

FIG. 7 is a schematic view of the method of making a subcutaneous path from the preferred incision and housing implantation point to a termination point for locating a subcutaneous electrode of the present invention;

FIG. 8 is a schematic view of an introducer set for performing the method of lead insertion of any of the described embodiments;

FIG. 9 is a schematic view of an alternative S-ICD of the present invention illustrating a lead subcutaneously and serpigiously implanted in the thorax of a patient for use particularly in children;

FIG. 10 is a schematic view of an alternate embodiment of an S-ICD of the present invention;

FIG. 11 is a schematic view of the S-ICD of FIG. 10 subcutaneously implanted in the thorax of a patient;

FIG. 12 is a schematic view of yet a further embodiment where the canister of the S-ICD of the present invention is shaped to be particularly useful in placing subcutaneously adjacent and parallel to a rib of a patient; and

FIG. 13 is a schematic of a different embodiment where the canister of the S-ICD of the present invention is shaped to be particularly useful in placing subcutaneously adjacent and parallel to a rib of a patient.

5        FIG. 14 is a schematic view of a Unitary Subcutaneous ICD (US-ICD) of the present invention;

FIG. 15 is a schematic view of the US-ICD subcutaneously implanted in the thorax of a patient;

FIG. 16 is a schematic view of the method of making a subcutaneous path from the preferred incision for implanting the US-ICD.

FIG. 17 is a schematic view of an introducer for performing the method of US-ICD implantation; and

FIG. 18 is an exploded schematic view of an alternate embodiment of the present invention with a plug-in portion that contains operational circuitry and means for generating cardioversion/defibrillation shock waves.

FIG. 14(a) is a side plan view of an embodiment of a lead electrode assembly with a top-mounted fin;

20        FIG. 14(b) is a top plan view of an embodiment of a lead electrode assembly with a top-mounted fin;

FIG. 14(c) is a side plan view of a section of the lead in an embodiment of the lead electrode assembly;



FIG. 14(d) is a cross-sectional view of a filar in the lead in an embodiment of the lead electrode assembly;

FIG. 14(e) is a cross-sectional view of the lead fastener of an embodiment of a lead electrode assembly;

5 FIG. 14(f) is an exploded view of the lead fastener of an embodiment of a lead electrode assembly;

FIG. 15(a) is a cross-sectional front plan view of an embodiment of a lead electrode assembly with a top-mounted fin;

10 FIG. 15(b) is a top plan view of an embodiment of a lead electrode assembly with a top-mounted fin;

FIG. 16(a) is a perspective view of an embodiment of a lead electrode assembly with a top-mounted fin;

FIG. 17(a) is a cross-sectional side plan view of an embodiment of a lead electrode assembly with a top-mounted fin and a molded cover;

FIG. 17(b) is a cross-sectional side plan view of an embodiment of a lead electrode assembly with a top-mounted fin that is slope-shaped and a molded cover;

20 FIG. 17(c) is cross-sectional front plan view of an embodiment of a lead electrode assembly with a top-mounted fin and a molded cover;

FIG. 17(d) is an exploded top plan view of the lead fastener in an embodiment of a lead electrode assembly with a top-mounted fin and a molded cover;

FIG. 17(e) is a bottom plan view of an embodiment of a lead electrode assembly with a top-mounted fin and a molded cover;

FIG. 17(f) is a side plan view of an embodiment of a lead electrode assembly with a top-mounted fin and a molded cover;

5 FIG. 17(g) is a top plan view of an embodiment of a lead electrode assembly with a top-mounted fin and a molded cover;

FIG. 18(a) is a side plan view of an embodiment of a lead electrode assembly with an elongated top-mounted fin and a molded cover;

10 FIG. 18(b) is a top plan view of an embodiment of a lead electrode assembly with an elongated top-mounted fin and a molded cover;

FIG. 18(c) is a bottom plan view of an embodiment of a lead electrode assembly with an elongated top-mounted fin and a molded cover;

15 FIG. 19 is a side plan view of a lead electrode assembly demonstrating the curvature of the electrode;

20 FIG. 20(a) is a top plan view of the backing layer and electrode of an embodiment of a lead electrode assembly with a side-mounted fin;

FIG. 20(b) is a side plan view of the backing layer and electrode of an embodiment of a lead electrode assembly with a side-mounted fin;

FIG. 20(c) is a bottom plan view of an embodiment of a lead electrode assembly with a side-mounted fin;

FIG. 20(d) is a bottom plan view of an embodiment of a lead electrode assembly with a side-mounted fin with a slope-shape;

5 FIG. 21(a) is a side plan view of a lead electrode assembly with a top-mounted loop;

FIG. 21(b) is a cross-sectional rear plan view of a lead electrode assembly with a top-mounted loop;

10 FIG. 21(c) is a top plan view of a lead electrode assembly with a top-mounted loop;

FIG. 22(a) is a top plan view of a backing layer for use in an embodiment of a lead electrode assembly with a top-mounted fin formed as part of the backing layer;

15 FIG. 22(b) is a top plan view of an embodiment of a lead electrode assembly with a top-mounted fin formed as part of the backing layer;

FIG. 22(c) is a side plan view of an embodiment of a lead electrode assembly with a top-mounted fin formed as part of the backing layer;

20 FIG. 22(d) is a front plan view of an embodiment of a lead electrode assembly with a top-mounted fin formed as part of a backing layer;

FIG. 22(e) is a side plan view of an embodiment of a lead electrode assembly with a top-mounted fin formed as part of a two-piece backing layer;

FIG. 22(f) is a front plan view of an embodiment of a lead electrode assembly with a top-mounted fin formed as part of a two-piece backing layer;

FIG. 23(a) is a front plan view of the embodiment of the lead electrode assembly of FIG. 22(e) and (f) in an upright position;

FIG. 23(b) is a front plan view of the embodiment of the lead electrode assembly of FIG. 22(e) and (f) illustrating the ability of the fin to fold;

FIG. 24(a) is a front plan view of an embodiment of a lead electrode assembly with a top-mounted tube formed as part of a backing layer;

FIG. 24(b) is a side plan view of an embodiment of a lead electrode assembly with a top-mounted tube formed as part of a backing layer;

FIG. 24(c) is a top plan view of an embodiment of a lead electrode assembly with a top-mounted tube formed as part of a backing layer;

FIG. 25(a) is a front plan view of an embodiment of a lead electrode assembly with a top-mounted fin connected with flexible joining material in an upright position;

FIG. 25(b) is a front plan view of an embodiment of a lead electrode assembly with a top-mounted fin connected with flexible joining material in a folded position;

FIG. 25(c) is a top plan view of an embodiment of a lead electrode assembly with a top-mounted fin connected with flexible joining material in an upright position;

FIG. 26 is a perspective view of an embodiment of a lead electrode assembly in which the appendage is a cylindrical tube;

FIG. 27 is a perspective view of an embodiment of a lead electrode assembly in which the appendage is a tube with a substantially triangular cross section;

FIGS. 28(a)-(d) are top plan views of embodiments of lead electrode assemblies illustrating shapes of the electrode and the lines of the lead;

FIGS. 28(e)-(h) are bottom plan views of embodiments of lead electrode assemblies illustrating shapes of the electrode;

FIG. 29 is a perspective view of a custom hemostat for lead electrode assembly implantation;

FIG. 30(a) is a perspective view of a patient's ribcage showing the orientation of the components in an implanted S-ICD system;

FIG. 30(b) is a cross-sectional side plan view of a patient's rib cage, skin, fat and the lead of the lead electrode assembly;

FIG. 31 is a front plan view illustrating the incision point for the surgery to implant the lead electrode assembly;

FIG. 32(a) is a cross-sectional bottom plan view of a patient along line 32(a) of FIG. 31 illustrating the creation of a subcutaneous path for implantation of the lead electrode assembly of an S-ICD system;

FIG. 32(b) is a perspective view of a lead electrode assembly captured by a custom hemostat;

FIG. 32(c) is a cross-sectional bottom plan view of a patient along line 32(a) of FIG. 31 illustrating the implantation of a lead electrode assembly via the subcutaneous path;

FIG. 32(d) is a top view of a lead electrode assembly captured by a custom hemostat;

FIG. 33(a) is a perspective view of a rail of an embodiment of the lead electrode assembly;

FIG. 33(b) is a cross-sectional front plan view of an embodiment of the lead electrode assembly where the appendage is a rail;

FIG. 33(c) is a top plan view of an embodiment of the lead electrode assembly where the appendage is a rail;

FIG. 34 is a top view of an embodiment of the lead electrode assembly where the appendage is a rail;

FIG. 35(a) is a perspective view of a lead electrode assembly manipulation tool with a rail fork;

FIG. 35(b) is a top plan view of a lead electrode assembly manipulation tool with a rail fork;

5 FIG. 35(c) is a side plan view of a lead electrode assembly manipulation tool with a rail fork;

FIG. 35(d) is a top plan view of a lead electrode assembly having a rail captured by a lead electrode assembly manipulation tool with a rail fork;

10 FIG. 36(a) is a cross-sectional side plan view of a lead electrode assembly with a pocket;

FIG. 36(b) is a top plan view of a lead electrode assembly with a pocket;

FIG. 36(c) is a cross-sectional side plan view of a lead electrode assembly with a pocket and a fin;

15 FIG. 37(a) is a bottom plan view of a lead electrode assembly with a pocket;

FIG. 37(b) is a top plan view of a lead electrode assembly with a pocket;

20 FIG. 38(a) is a top plan view of a lead electrode assembly manipulation tool with a paddle;

FIG. 38(b) is a side plan view of a lead electrode assembly manipulation tool with a paddle;

FIG. 38(c) is a top plan view of a lead electrode assembly with a pocket captured by a lead electrode assembly manipulation tool with a paddle;

FIG. 39(a) is a cross-sectional rear plan view of a lead electrode assembly with a first channel guide and a second channel guide;

FIG. 39(b) is a top plan view of a lead electrode assembly with a first channel guide and a second channel guide;

FIG. 40(a) is a top plan view of a lead electrode assembly manipulation tool with a channel guide fork;

FIG. 40(b) is a top plan view of a lead electrode assembly with a first channel guide and a second channel guide captured by a lead electrode assembly manipulation tool with a channel guide fork;

FIG. 41(a) is a perspective view of a subcutaneous implantable cardioverter-defibrillator kit; and

FIG. 41(b) is a perspective view of a hemostat illustrating the length measurement.

#### DETAILED DESCRIPTION

Turning now to FIG. 1, the S-ICD of the present invention is illustrated. The S-ICD consists of an electrically active canister 11 and a subcutaneous electrode 13 attached to the canister. The canister has an electrically active surface 15 that is electrically insulated from the electrode connector



block 17 and the canister housing 16 via insulating area 14. The canister can be similar to numerous electrically active canisters commercially available in that the canister will contain a battery supply, capacitor and operational circuitry.

5 Alternatively, the canister can be thin and elongated to conform to the intercostal space. The circuitry will be able to monitor cardiac rhythms for tachycardia and fibrillation, and if detected, will initiate charging the capacitor and then delivering cardioversion /defibrillation energy through the active surface of the housing and to the subcutaneous electrode.

10 Examples of such circuitry are described in U.S. Patent Nos. 4,693,253 and 5,105,810, the entire disclosures of which are herein incorporated by reference. The canister circuitry can provide cardioversion/ defibrillation energy in different types of waveforms. In the preferred embodiment, a 100 uF biphasic waveform is used of approximately 10-20 ms total duration and with the initial phase containing approximately 2/3 of the energy, however, any type of waveform can be utilized such as monophasic, biphasic, multiphasic or alternative waveforms as is  
20 known in the art.

In addition to providing cardioversion/ defibrillation energy, the circuitry can also provide transthoracic cardiac pacing energy. The optional circuitry will be able to monitor the heart for bradycardia and/or tachycardia rhythms. Once a

bradycardia or tachycardia rhythm is detected, the circuitry can then deliver appropriate pacing energy at appropriate intervals through the active surface and the subcutaneous electrode. Pacing stimuli will be biphasic in the preferred embodiment and similar in pulse amplitude to that used for conventional transthoracic pacing.

This same circuitry can also be used to deliver low amplitude shocks on the T-wave for induction of ventricular fibrillation for testing S-ICD performance in treating V-Fib as is described in U.S. Patent No. 5,129,392, the entire disclosure of which is hereby incorporated by reference. Also the circuitry can be provided with rapid induction of ventricular fibrillation or ventricular tachycardia using rapid ventricular pacing. Another optional way for inducing ventricular fibrillation would be to provide a continuous low voltage, i.e., about 3 volts, across the heart during the entire cardiac cycle.

Another optional aspect of the present invention is that the operational circuitry can detect the presence of atrial fibrillation as described in Olson, W. et al. "Onset And Stability For Ventricular Tachyarrhythmia Detection in an Implantable Cardioverter and Defibrillator," Computers in Cardiology (1986) pp. 167-170. Detection can be provided via R-R Cycle length instability detection algorithms. Once atrial fibrillation has been detected, the operational circuitry will

then provide QRS synchronized atrial  
defibrillation/cardioversion using the same shock energy and  
waveshape characteristics used for ventricular defibrillation/  
cardioversion.

5 The sensing circuitry will utilize the electronic signals  
generated from the heart and will primarily detect QRS waves.  
In one embodiment, the circuitry will be programmed to detect  
only ventricular tachycardias or fibrillations. The detection  
circuitry will utilize in its most direct form, a rate detection  
10 algorithm that triggers charging of the capacitor once the  
ventricular rate exceeds some predetermined level for a fixed  
period of time: for example, if the ventricular rate exceeds  
240 bpm on average for more than 4 seconds. Once the capacitor  
is charged, a confirmatory rhythm check would ensure that the  
rate persists for at least another 1 second before discharge.  
Similarly, termination algorithms could be instituted that  
ensure that a rhythm less than 240 bpm persisting for at least 4  
seconds before the capacitor charge is drained to an internal  
resistor. Detection, confirmation and termination algorithms as  
20 are described above and in the art can be modulated to increase  
sensitivity and specificity by examining QRS beat-to-beat  
uniformity, QRS signal frequency content, R-R interval stability  
data, and signal amplitude characteristics all or part of which

can be used to increase or decrease both sensitivity and specificity of S-ICD arrhythmia detection function.

In addition to use of the sense circuitry for detection of V-Fib or V-Tach by examining the QRS waves, the sense circuitry  
5 can check for the presence or the absence of respiration. The respiration rate can be detected by monitoring the impedance across the thorax using subthreshold currents delivered across the active can and the high voltage subcutaneous lead electrode and monitoring the frequency in undulation in the waveform that  
10 results from the undulations of transthoracic impedance during the respiratory cycle. If there is no undulation, then the patient is not respiring and this lack of respiration can be used to confirm the QRS findings of cardiac arrest. The same technique can be used to provide information about the respiratory rate or estimate cardiac output as described in U.S. Patent Nos. 6,095,987, 5,423,326, 4,450,527, the entire disclosures of which are incorporated herein by reference.

The canister of the present invention can be made out of titanium alloy or other presently preferred electrically active  
20 canister designs. However, it is contemplated that a malleable canister that can conform to the curvature of the patient's chest will be preferred. In this way the patient can have a comfortable canister that conforms to the shape of the patient's rib cage. Examples of conforming canisters are provided in U.S.

Patent No. 5,645,586, the entire disclosure of which is herein incorporated by reference. Therefore, the canister can be made out of numerous materials such as medical grade plastics, metals, and alloys. In the preferred embodiment, the canister is smaller than 60 cc volume having a weight of less than 100 gms for long term wearability, especially in children. The canister and the lead of the S-ICD can also use fractal or wrinkled surfaces to increase surface area to improve defibrillation capability. Because of the primary prevention role of the therapy and the likely need to reach energies over 40 Joules, a feature of the preferred embodiment is that the charge time for the therapy, intentionally is relatively long to allow capacitor charging within the limitations of device size. Examples of small ICD housings are disclosed in U.S. Patents Nos. 5,597,956 and 5,405,363, the entire disclosures of which are herein incorporated by reference.

Different subcutaneous electrodes 13 of the present invention are illustrated in FIGS. 1-3. Turning to FIG. 1, the lead 21 for the subcutaneous electrode is preferably composed of silicone or polyurethane insulation. The electrode is connected to the canister at its proximal end via connection port 19 which is located on an electrically insulated area 17 of the canister. The electrode illustrated is a composite electrode with three different electrodes attached to the lead. In the embodiment

illustrated, an optional anchor segment 52 is attached at the most distal end of the subcutaneous electrode for anchoring the electrode into soft tissue such that the electrode does not dislodge after implantation.

5       The most distal electrode on the composite subcutaneous electrode is a coil electrode 27 that is used for delivering the high voltage cardioversion/ defibrillation energy across the heart. The coil cardioversion/defibrillation electrode is about 5-10 cm in length. Proximal to the coil electrode are two sense electrodes, a first sense electrode 25 is located proximally to the coil electrode and a second sense electrode 23 is located proximally to the first sense electrode. The sense electrodes are spaced far enough apart to be able to have good QRS detection. This spacing can range from 1 to 10 cm with 4 cm being presently preferred. The electrodes may or may not be circumferential with the preferred embodiment. Having the electrodes non-circumferential and positioned outward, toward the skin surface, is a means to minimize muscle artifact and enhance QRS signal quality. The sensing electrodes are  
20 electrically isolated from the cardioversion/defibrillation electrode via insulating areas 29. Similar types of cardioversion/defibrillation electrodes are currently commercially available in a transvenous configuration. For example, U.S. Patent No. 5,534,022, the entire disclosure of

which is herein incorporated by reference, discloses a composite electrode with a coil cardioversion/defibrillation electrode and sense electrodes. Modifications to this arrangement is contemplated within the scope of the invention.

5 One such modification is illustrated in FIG. 2 where the two sensing electrodes 25 and 23 are non-circumferential sensing electrodes and one is located at the distal end, the other is located proximal thereto with the coil electrode located in between the two sensing electrodes. In this embodiment the sense electrodes are spaced about 6 to about 12 cm apart depending on the length of the coil electrode used. FIG. 3 illustrates yet a further embodiment where the two sensing electrodes are located at the distal end to the composite electrode with the coil electrode located proximally thereto. Other possibilities exist and are contemplated within the present invention. For example, having only one sensing electrode, either proximal or distal to the coil cardioversion/defibrillation electrode with the coil serving as both a sensing electrode and a cardioversion/defibrillation electrode.

20 It is also contemplated within the scope of the invention that the sensing of QRS waves (and transthoracic impedance) can be carried out via sense electrodes on the canister housing or in combination with the cardioversion/defibrillation coil electrode and/or the subcutaneous lead sensing electrode(s). In

this way, sensing could be performed via the one coil electrode located on the subcutaneous electrode and the active surface on the canister housing. Another possibility would be to have only one sense electrode located on the subcutaneous electrode and the sensing would be performed by that one electrode and either the coil electrode on the subcutaneous electrode or by the active surface of the canister. The use of sensing electrodes on the canister would eliminate the need for sensing electrodes on the subcutaneous electrode. It is also contemplated that the subcutaneous electrode would be provided with at least one sense electrode, the canister with at least one sense electrode, and if multiple sense electrodes are used on either the subcutaneous electrode and/or the canister, that the best QRS wave detection combination will be identified when the S-ICD is implanted and this combination can be selected, activating the best sensing arrangement from all the existing sensing possibilities. Turning again to FIG. 2, two sensing electrodes 26 and 28 are located on the electrically active surface 15 with electrical insulator rings 30 placed between the sense electrodes and the active surface. These canister sense electrodes could be switched off and electrically insulated during and shortly after defibrillation/ cardioversion shock delivery. The canister sense electrodes may also be placed on the electrically inactive surface of the canister. In the embodiment of FIG. 2, there are



actually four sensing electrodes, two on the subcutaneous lead and two on the canister. In the preferred embodiment, the ability to change which electrodes are used for sensing would be a programmable feature of the S-ICD to adapt to changes in the patient physiology and size (in the case of children) over time. The programming could be done via the use of physical switches on the canister, or as presently preferred, via the use of a programming wand or via a wireless connection to program the circuitry within the canister.

The canister could be employed as either a cathode or an anode of the S-ICD cardioversion/defibrillation system. If the canister is the cathode, then the subcutaneous coil electrode would be the anode. Likewise, if the canister is the anode, then the subcutaneous electrode would be the cathode.

The active canister housing will provide energy and voltage intermediate to that available with ICDs and most AEDs. The typical maximum voltage necessary for ICDs using most biphasic waveforms is approximately 750 Volts with an associated maximum energy of approximately 40 Joules. The typical maximum voltage necessary for AEDs is approximately 2000-5000 Volts with an associated maximum energy of approximately 200-360 Joules depending upon the model and waveform used. The S-ICD of the present invention uses maximum voltages in the range of about 700 to about 3150 Volts and is associated with energies of about

40 to about 210 Joules. The capacitance of the S-ICD could range from about 50 to about 200 micro farads.

The sense circuitry contained within the canister is highly sensitive and specific for the presence or absence of life threatening ventricular arrhythmias. Features of the detection algorithm are programmable and the algorithm is focused on the detection of V-FIB and high rate V-TACH (>240 bpm). Although the S-ICD of the present invention may rarely be used for an actual life threatening event, the simplicity of design and implementation allows it to be employed in large populations of patients at modest risk with modest cost by non-cardiac electrophysiologists. Consequently, the S-ICD of the present invention focuses mostly on the detection and therapy of the most malignant rhythm disorders. As part of the detection algorithm's applicability to children, the upper rate range is programmable upward for use in children, known to have rapid supraventricular tachycardias and more rapid ventricular fibrillation. Energy levels also are programmable downward in order to allow treatment of neonates and infants.

Turning now to FIG. 4, the optimal subcutaneous placement of the S-ICD of the present invention is illustrated. As would be evidence to a person skilled in the art, the actual location of the S-ICD is in a subcutaneous space that is developed during the implantation process. The heart is not exposed during this

process and the heart is schematically illustrated in the figures only for help in understanding where the canister and coil electrode are three dimensionally located in the left mid-clavicular line approximately at the level of the inframammary crease at approximately the 5th rib. The lead 21 of the subcutaneous electrode traverses in a subcutaneous path around the thorax terminating with its distal electrode end at the posterior axillary line ideally just lateral to the left scapula. This way the canister and subcutaneous cardioversion/defibrillation electrode provide a reasonably good pathway for current delivery to the majority of the ventricular myocardium.

FIG. 5 illustrates a different placement of the present invention. The S-ICD canister with the active housing is located in the left posterior axillary line approximately lateral to the tip of the inferior portion of the scapula. This location is especially useful in children. The lead 21 of the subcutaneous electrode traverses in a subcutaneous path around the thorax terminating with its distal electrode end at the anterior precordial region, ideally in the inframammary crease.

FIG. 6 illustrates the embodiment of FIG. 1 subcutaneously implanted in the thorax with the proximal sense electrodes 23 and 25 located at approximately the left axillary line with the

cardioversion/defibrillation electrode just lateral to the tip of the inferior portion of the scapula.

FIG. 7 schematically illustrates the method for implanting the S-ICD of the present invention. An incision 31 is made in the left anterior axillary line approximately at the level of the cardiac apex. This incision location is distinct from that chosen for S-ICD placement and is selected specifically to allow both canister location more medially in the left inframammary crease and lead positioning more posteriorly via the introducer set (described below) around to the left posterior axillary line lateral to the left scapula. That said, the incision can be anywhere on the thorax deemed reasonably by the implanting physician although in the preferred embodiment, the S-ICD of the present invention will be applied in this region. A subcutaneous pathway 33 is then created medially to the inframmary crease for the canister and posteriorly to the left posterior axillary line lateral to the left scapula for the lead.

The S-ICD canister 11 is then placed subcutaneously at the location of the incision or medially at the subcutaneous region at the left inframmary crease. The subcutaneous electrode 13 is placed with a specially designed curved introducer set 40 (see FIG. 8). The introducer set comprises a curved trocar 42 and a stiff curved peel away sheath 44. The peel away sheath is

curved to allow for placement around the rib cage of the patient in the subcutaneous space created by the trocar. The sheath has to be stiff enough to allow for the placement of the electrodes without the sheath collapsing or bending. Preferably the sheath

5 is made out of a biocompatible plastic material and is perforated along its axial length to allow for it to split apart into two sections. The trocar has a proximal handle 41 and a curved shaft 43. The distal end 45 of the trocar is tapered to allow for dissection of a subcutaneous path 33 in the patient.

10 Preferably, the trocar is cannulated having a central Lumen 46 and terminating in an opening 48 at the distal end. Local anesthetic such as lidocaine can be delivered, if necessary, through the lumen or through a curved and elongated needle designed to anesthetize the path to be used for trocar insertion

15 should general anesthesia not be employed. The curved peel away sheath 44 has a proximal pull tab 49 for breaking the sheath into two halves along its axial shaft 47. The sheath is placed over a guidewire inserted through the trocar after the subcutaneous path has been created. The subcutaneous pathway is

20 then developed until it terminates subcutaneously at a location that, if a straight line were drawn from the canister location to the path termination point the line would intersect a substantial portion of the left ventricular mass of the patient.

The guidewire is then removed leaving the peel away sheath. The

subcutaneous lead system is then inserted through the sheath until it is in the proper location. Once the subcutaneous lead system is in the proper location, the sheath is split in half using the pull tab 49 and removed. If more than one  
5 subcutaneous electrode is being used, a new curved peel away sheath can be used for each subcutaneous electrode.

10 The S-ICD will have prophylactic use in adults where chronic transvenous/epicardial ICD lead systems pose excessive risk or have already resulted in difficulty, such as sepsis or lead fractures. It is also contemplated that a major use of the S-ICD system of the present invention will be for prophylactic  
15 use in children who are at risk for having fatal arrhythmias, where chronic transvenous lead systems pose significant management problems. Additionally, with the use of standard transvenous ICDs in children, problems develop during patient  
20 growth in that the lead system does not accommodate the growth. FIG. 9 illustrates the placement of the S-ICD subcutaneous lead system such that the problem that growth presents to the lead system is overcome. The distal end of the subcutaneous  
25 electrode is placed in the same location as described above providing a good location for the coil cardioversion/defibrillation electrode 27 and the sensing electrodes 23 and 25. The insulated lead 21, however is no longer placed in a taught configuration. Instead, the lead is

serpiginously placed with a specially designed introducer trocar and sheath such that it has numerous waves or bends. As the child grows, the waves or bends will straighten out lengthening the lead system while maintaining proper electrode placement.

5 Although it is expected that fibrous scarring especially around the defibrillation coil will help anchor it into position to maintain its posterior position during growth, a lead system with a distal tine or screw electrode anchoring system 52 can also be incorporated into the distal tip of the lead to  
10 facilitate lead stability (see FIG. 1). Other anchoring systems can also be used such as hooks, sutures, or the like.

FIGS. 10 and 11 illustrate another embodiment of the present S-ICD invention. In this embodiment there are two subcutaneous electrodes 13 and 13' of opposite polarity to the  
15 canister. The additional subcutaneous electrode 13' is essentially identical to the previously described electrode. In this embodiment the cardioversion/defibrillation energy is delivered between the active surface of the canister and the two coil electrodes 27 and 27'. Additionally, provided in the  
20 canister is means for selecting the optimum sensing arrangement between the four sense electrodes 23, 23', 25, and 25'. The two electrodes are subcutaneously placed on the same side of the heart. As illustrated in FIG. 6, one subcutaneous electrode 13 is placed inferiorly and the other electrode 13' is placed

superiorly. It is also contemplated with this dual subcutaneous electrode system that the canister and one subcutaneous electrode are the same polarity and the other subcutaneous electrode is the opposite polarity.

5       Turning now to FIGS. 12 and 13, further embodiments are illustrated where the canister 11 of the S-ICD of the present invention is shaped to be particularly useful in placing subcutaneously adjacent and parallel to a rib of a patient. The canister is long, thin, and curved to conform to the shape of  
10 the patient's rib. In the embodiment illustrated in FIG. 12, the canister has a diameter ranging from about 0.5 cm to about 2 cm without 1 cm being presently preferred. Alternatively, instead of having a circular cross sectional area, the canister could have a rectangular or square cross sectional area as  
15 illustrated in FIG. 13 without falling outside of the scope of the present invention. The length of the canister can vary depending on the size of the patient's thorax. Currently the canister is about 5 cm to about 15 cm long with about 10 being presently preferred. The canister is curved to conform to the  
20 curvature of the ribs of the thorax. The radius of the curvature will vary depending on the size of the patient, with smaller radiuses for smaller patients and larger radiuses for larger patients. The radius of the curvature can range from about 5 cm to about 35 cm depending on the size of the patient.



Additionally, the radius of the curvature need not be uniform throughout the canister such that it can be shaped closer to the shape of the ribs. The canister has an active surface, 15 that is located on the interior (concave) portion of the curvature and an inactive surface 16 that is located on the exterior (convex) portion of the curvature. The leads of these embodiments, which are not illustrated except for the attachment port 19 and the proximal end of the lead 21, can be any of the leads previously described above, with the lead illustrated in FIG. 1 being presently preferred.

The circuitry of this canister is similar to the circuitry described above. Additionally, the canister can optionally have at least one sense electrode located on either the active surface of the inactive surface and the circuitry within the canister can be programmable as described above to allow for the selection of the best sense electrodes. It is presently preferred that the canister have two sense electrodes 26 and 28 located on the inactive surface of the canisters as illustrated, where the electrodes are spaced from about 1 to about 10 cm apart with a spacing of about 3 cm being presently preferred. However, the sense electrodes can be located on the active surface as described above.

It is envisioned that the embodiment of FIG. 12 will be subcutaneously implanted adjacent and parallel to the left

anterior 5th rib, either between the 4th and 5th ribs or between the 5th and 6th ribs. However other locations can be used.

Another component of the S-ICD of the present invention is a cutaneous test electrode system designed to simulate the subcutaneous high voltage shock electrode system as well as the QRS cardiac rhythm detection system. This test electrode system is comprised of a cutaneous patch electrode of similar surface area and impedance to that of the S-ICD canister itself together with a cutaneous strip electrode comprising a defibrillation strip as well as two button electrodes for sensing of the QRS. Several cutaneous strip electrodes are available to allow for testing various bipole spacings to optimize signal detection comparable to the implantable system.

Figures 14 to 18 depict particular US-ICD embodiments of the present invention. The various sensing, shocking and pacing circuitry, described in detail above with respect to the S-ICD embodiments, may additionally be incorporated into the following US-ICD embodiments. Furthermore, particular aspects of any individual S-ICD embodiment discussed above, may be incorporated, in whole or in part, into the US-ICD embodiments depicted in the following figures.

Turning now to Fig. 14, the US-ICD of the present invention is illustrated. The US-ICD consists of a curved housing 1211 with a first and second end. The first end 1413 is thicker than

the second end 1215. This thicker area houses a battery supply, capacitor and operational circuitry for the US-ICD. The circuitry will be able to monitor cardiac rhythms for tachycardia and fibrillation, and if detected, will initiate charging the capacitor and then delivering cardioversion/defibrillation energy through the two cardioversion/defibrillating electrodes 1417 and 1219 located on the outer surface of the two ends of the housing. The circuitry can provide cardioversion/defibrillation energy in different types of waveforms. In the preferred embodiment, a 100 uF biphasic waveform is used of approximately 10-20 ms total duration and with the initial phase containing approximately 2/3 of the energy, however, any type of waveform can be utilized such as monophasic, biphasic, multiphasic or alternative waveforms as is known in the art.

The housing of the present invention can be made out of titanium alloy or other presently preferred ICD designs. It is contemplated that the housing is also made out of biocompatible plastic materials that electronically insulate the electrodes from each other. However, it is contemplated that a malleable canister that can conform to the curvature of the patient's chest will be preferred. In this way the patient can have a comfortable canister that conforms to the unique shape of the patient's rib cage. Examples of conforming ICD housings are

provided in U.S. Patent No. 5,645,586, the entire disclosure of which is herein incorporated by reference. In the preferred embodiment, the housing is curved in the shape of a 5<sup>th</sup> rib of a person. Because there are many different sizes of people, the housing will come in different incremental sizes to allow a good match between the size of the rib cage and the size of the US-ICD. The length of the US-ICD will range from about 15 to about 50 cm. Because of the primary preventative role of the therapy and the need to reach energies over 40 Joules, a feature of the preferred embodiment is that the charge time for the therapy, intentionally be relatively long to allow capacitor charging within the limitations of device size.

The thick end of the housing is currently needed to allow for the placement of the battery supply, operational circuitry, and capacitors. It is contemplated that the thick end will be about 0.5 cm to about 2 cm wide with about 1 cm being presently preferred. As microtechnology advances, the thickness of the housing will become smaller.

The two cardioversion/defibrillation electrodes on the housing are used for delivering the high voltage cardioversion/defibrillation energy across the heart. In the preferred embodiment, the cardioversion/defibrillation electrodes are coil electrodes, however, other cardioversion/defibrillation electrodes could be used such as

having electrically isolated active surfaces or platinum alloy electrodes. The coil cardioversion/defibrillation electrodes are about 5-10 cm in length. Located on the housing between the two cardioversion/defibrillation electrodes are two sense electrodes 1425 and 1427. The sense electrodes are spaced far enough apart to be able to have good QRS detection. This spacing can range from 1 to 10 cm with 4 cm being presently preferred. The electrodes may or may not be circumferential with the preferred embodiment. Having the electrodes non-circumferential and positioned outward, toward the skin surface, is a means to minimize muscle artifact and enhance QRS signal quality. The sensing electrodes are electrically isolated from the cardioversion/defibrillation electrode via insulating areas 1423. Analogous types of cardioversion/defibrillation electrodes are currently commercially available in a transvenous configuration. For example, U.S. Patent No. 5,534,022, the entire disclosure of which is herein incorporated by reference, discloses a composite electrode with a coil cardioversion/defibrillation electrode and sense electrodes. Modifications to this arrangement is contemplated within the scope of the invention. One such modification is to have the sense electrodes at the two ends of the housing and have the cardioversion/defibrillation electrodes located in between the sense electrodes. Another modification is to have three or more

sense electrodes spaced throughout the housing and allow for the selection of the two best sensing electrodes. If three or more sensing electrodes are used, then the ability to change which electrodes are used for sensing would be a programmable feature of the US-ICD to adapt to changes in the patient physiology and size over time. The programming could be done via the use of physical switches on the canister, or as presently preferred, via the use of a programming wand or via a wireless connection to program the circuitry within the canister.

Turning now to Fig. 15, the optimal subcutaneous placement of the US-ICD of the present invention is illustrated. As would be evident to a person skilled in the art, the actual location of the US-ICD is in a subcutaneous space that is developed during the implantation process. The heart is not exposed during this process and the heart is schematically illustrated in the figures only for help in understanding where the device and its various electrodes are three dimensionally located in the thorax of the patient. The US-ICD is located between the left mid-clavicular line approximately at the level of the inframammary crease at approximately the 5<sup>th</sup> rib and the posterior axillary line, ideally just lateral to the left scapula. This way the US-ICD provides a reasonably good pathway for current delivery to the majority of the ventricular myocardium.

Fig. 16 schematically illustrates the method for implanting the US-ICD of the present invention. An incision 1631 is made in the left anterior axillary line approximately at the level of the cardiac apex. A subcutaneous pathway is then created that extends posteriorly to allow placement of the US-ICD. The incision can be anywhere on the thorax deemed reasonable by the implanting physician although in the preferred embodiment, the US-ICD of the present invention will be applied in this region. The subcutaneous pathway is created medially to the inframammary crease and extends posteriorly to the left posterior axillary line. The pathway is developed with a specially designed curved introducer 1742 (see Fig. 17). The trocar has a proximal handle 1641 and a curved shaft 1643. The distal end 1745 of the trocar is tapered to allow for dissection of a subcutaneous path in the patient. Preferably, the trocar is cannulated having a central lumen 1746 and terminating in an opening 1748 at the distal end. Local anesthetic such as lidocaine can be delivered, if necessary, through the lumen or through a curved and elongated needle designed to anesthetize the path to be used for trocar insertion should general anesthesia not be employed. Once the subcutaneous pathway is developed, the US-ICD is implanted in the subcutaneous space, the skin incision is closed using standard techniques.

As described previously, the US-ICDs of the present invention vary in length and curvature. The US-ICDs are provided in incremental sizes for subcutaneous implantation in different sized patients. Turning now to Fig. 18, a different embodiment is schematically illustrated in exploded view which provides different sized US-ICDs that are easier to manufacture. The different sized US-ICDs will all have the same sized and shaped thick end 1413. The thick end is hollow inside allowing for the insertion of a core operational member 1853. The core member comprises a housing 1857 which contains the battery supply, capacitor and operational circuitry for the US-ICD. The proximal end of the core member has a plurality of electronic plug connectors. Plug connectors 1861 and 1863 are electronically connected to the sense electrodes via pressure fit connectors (not illustrated) inside the thick end which are standard in the art. Plug connectors 1865 and 1867 are also electronically connected to the cardioverter/defibrillator electrodes via pressure fit connectors inside the thick end. The distal end of the core member comprises an end cap 1855, and a ribbed fitting 1859 which creates a water-tight seal when the core member is inserted into opening 1851 of the thick end of the US-ICD.

The core member of the different sized and shaped US-ICD will all be the same size and shape. That way, during an



implantation procedures, multiple sized US-ICDs can be available for implantation, each one without a core member. Once the implantation procedure is being performed, then the correct sized US-ICD can be selected and the core member can be inserted  
5 into the US-ICD and then programmed as described above. Another advantage of this configuration is when the battery within the core member needs replacing it can be done without removing the entire US-ICD.

FIG. 14(a) illustrates an embodiment of the subcutaneous  
10 lead electrode or "lead electrode assembly" 100. The lead electrode assembly 100 is designed to provide an electrode 107 to be implanted subcutaneously in the posterior thorax of a patient for delivery of cardioversion/defibrillation energy. The lead electrode assembly 100 is further designed to provide a  
15 path for the cardioversion/defibrillation energy to reach the electrode 107 from the operational circuitry within the canister 11 of an S-ICD such as the embodiment shown in FIG. 1.

The lead electrode assembly 100 comprises a connector 111,  
20 a lead 21, a lead fastener 146, an electrode 107 and an appendage 118. The connector 111 is connected to the lead 21. The lead 21 is further connected to the electrode 107 with the lead fastener 146. The appendage 118 is mounted to the electrode 107.

The connector 111 provides an electrical connection between the lead 21 and the operational circuitry within the canister 11 of an S-ICD such as the embodiment shown in FIG. 1. Connector 111 is designed to mate with the connection port 19 on the canister 11. In the embodiment under discussion, the connector 111 meets the IS-1 standard.

The lead 21 of the lead electrode assembly 100 provides an electrical connection between the connector 111 and the electrode 107. The lead 21 comprises a distal end 101 and a proximal end 102. The distal end 101 of the lead 21 is attached to the connector 111. The proximal end 102 of the lead 21 is attached to electrode 107 with the lead fastener 146.

The lead 21 has a lead length,  $l_{\text{Lead}}$ , measured from the connector 111 along the lead 21 to the lead fastener 146 of the electrode 107. The length of the lead 21 is approximately 25 cm. In alternative embodiments, the lead lengths range between approximately 5 cm and approximately 52 cm.

The lead fastener 146 provides a robust physical and electrical connection between the lead 21 and the electrode 107.

The lead fastener 146 joins the proximal end 102 of the lead 21 to electrode 107.

The electrode 107 comprises an electrically conductive member designed to make contact with the tissue of the patient and transfer cardioversion/defibrillation energy to the tissue of the patient from the S-ICD canister 11.

10 The electrode 107 illustrated is generally flat and planar, comprising a top surface 110, a bottom surface 115, a distal end 103 and a proximal end 104. The lead fastener 146 is attached to the top surface 110 of the distal end 103 of the electrode 107.

15 The electrode 107 may have shapes other than planar. In an alternate embodiment, the electrode 107 is shaped like a coil.

20 The appendage 118 is a member attached to the electrode 107 that can be gripped and used to precisely locate the lead electrode assembly 100 during its surgical implantation within the patient.

The appendage 118 has a first end 105, a second end 106, a distal edge 121 and a proximal edge 129. The second end 106 of

the appendage 118 is attached to the top surface 110 of the electrode 107. The appendage 118 is positioned such that its proximal edge 129 is within approximately 20 mm of the proximal end 104 of the electrode 107. In alternate embodiments, the  
5 appendage 118 is attached to the electrode 107 in other positions.

It is useful at this point, to set out several general definitions for future reference in discussing the dimensions  
10 and placement of appendages 118.

9940356-063701  
The appendage height,  $h_{\text{Appendage}}$ , is defined as the distance from the point of the appendage 118 most distant from the electrode 107 to a point of the appendage 118 closest to the  
15 electrode 107 measured along a line perpendicular to the top surface 110 of the electrode 107. The appendage height of the appendage 118 illustrated, for example, would be measured between the first end 105 of the appendage 118 and the second end 106 of the appendage 118.

20

The appendage height of the appendage 118 illustrated is approximately 5 mm. In alternative embodiments, the appendage heights range between approximately 1 mm and approximately  
10 mm.

The appendage interface is defined as the part of the appendage 118 that joins it to the electrode 107. The appendage interface of the appendage 118 illustrated, for example, would  
5 be the second end 106 of the appendage 118.

The appendage length,  $l_{\text{Appendage}}$ , is the length of the appendage 118 along the appendage interface. The appendage interface of the appendage 118 illustrated, for example, would  
10 be the length of the second end 106 of the appendage 118.

The appendage length of the appendage 118 illustrated in FIG. 14 is approximately 1 cm. In alternative embodiments, appendage lengths range between approximately 2 mm and  
15 approximately 6 cm. In an alternate embodiment, the appendage 118 is substantially as long as the electrode 107.

More particularly, the appendage 118 of the embodiment illustrated is a fin 120 comprising a fin core 122 (phantom  
20 view) and a coating 125.

The fin core 122 generally provides support for the fin 120. The fin core 122 has a first end 126 and a second end 127.

The second end 127 of the fin core 122 is attached to the top surface 110 of the electrode 107.

The fin core 122 comprises a metal selected from the group consisting essentially of titanium, nickel alloys, stainless steel alloys, platinum, platinum iridium, and mixtures thereof. In other embodiments, the fin core 122 comprises any rugged material that can be attached to the first surface 110 of the electrode 107.

10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
The coating 125 is disposed around the fin core 122. The coating 125 provides a surface for the fin 120 that can be easily gripped during the implantation of the lead electrode assembly 100. The coating 125 covering the fin core 122 is composed of molded silicone. In an alternative embodiment, the coating 125 may be any polymeric material. In this specification, the term polymeric material includes the group of materials consisting of a polyurethane, a polyamide, a polyeteretherketone (PEEK), a polyether block amide (PEBA), a polytetrafluoroethylene (PTFE), a silicone and mixtures thereof.

In one embodiment, the fin 120 is reinforced with a layer of Dacron<sup>®</sup> polymer mesh attached to the inside of the coating 125. Dacron<sup>®</sup> is a registered trademark of E.I. du Pont de

Nemours and Company Corporation, Wilmington, DE. In another embodiment, the Dacron® polymer mesh attached to the outside of the coating 125. In another embodiment, the fin 120 is reinforced with a layer of any polymeric material.

5

FIG. 14(b) illustrates a top view of the lead electrode assembly 100. The electrode 107 is substantially rectangular in shape, comprising a first pair of sides 108, a second pair of sides 109 and four corners 112. In an alternative embodiment the electrode 107 has a shape other than rectangular. In this embodiment, the corners 112 of the electrode 107 are rounded. In an alternative embodiment the corners 112 of the electrode 107 are not rounded.

The first pair of sides 108 of the electrode 107 are substantially linear, substantially parallel to each other and are approximately 1 cm in length. The second pair of sides 109 of the electrode 107 are also substantially linear, substantially parallel with each other and are approximately 5 cm in length. The bottom surface 115 of the electrode 107 has an area of approximately 500 square mm. In alternative embodiments, the first pair of sides 108 and the second pair of sides 109 of the electrode 107 are neither linear nor parallel.

In alternative embodiments, the length of the first pair of sides 108 and second pair of sides 109 of the electrode 107 range independently between approximately 1 cm and approximately 5 cm. The surface area of the bottom surface 115 of the electrode 107 ranges between approximately 100 sq. mm and approximately 2000 sq. mm. In one embodiment, the first pair of sides 108 and second pair of sides 109 of the electrode 107 are linear and of equal length, such that the electrode 107 is substantially square-shaped.

10  
09940356-002701  
15  
The electrode 107 comprises a sheet of metallic mesh 114 further comprised of woven wires 119. The metallic mesh 114 comprises a metal selected from the group consisting essentially of titanium, nickel alloys, stainless steel alloys, platinum, platinum iridium, and mixtures thereof. In other embodiments, the metallic mesh 114 comprises any conductive material.

20  
In an alternate embodiment, the electrode 107 comprises a solid metallic plate. The metallic plate comprises a metal selected from the group consisting essentially of titanium, nickel alloys, stainless steel alloys, platinum, platinum iridium, and mixtures thereof. In other embodiments, the solid plate comprises any conductive material.



The metallic mesh 114 is approximately a 150 mesh, having approximately 150 individual wires 119 per inch. In alternative embodiments, the metallic mesh 114 ranges between approximately a 50 mesh and approximately a 200 mesh. In this embodiment, the diameter of the wires 119 of the mesh is approximately 1 mil. In alternative embodiments, the diameter of the wires 119 ranges between approximately 1 and approximately 5 mils.

10 The metallic mesh 114 is first prepared by spot welding together the wires 119 located along the first pair of sides 108 and second pair of sides 109 of the metallic mesh 114. The excess lengths of wires are then ground or machined flush, so as to produce a smooth edge and to form a smooth border 113. In an alternate embodiment, the wires 119 located along the first pair of sides 108 and second pair of sides 109 of the metallic mesh 114 are bent in toward the metallic mesh 114 to form a smooth border 113.

20 The fin 120 is attached to the top surface 110 of the electrode 107 in a position centered between the first pair of sides 108 of the electrode 107. In other embodiments, the fin 120 is not centered between the first pair of sides 108 of the electrode 107.

The fin 120 is planar shape comprising a first face 191 and a second face 192. The first face 191 and the second face 192 of the fin 120 are substantially parallel to the first pair of sides 108 of the electrode 107. In other embodiments, the first face 191 and the second face 192 of the fin 120 are positioned in orientations other than parallel to the first pair of sides 108 of the electrode 107.

The first face 191 and the second face 192 of the fin 120 extend from and substantially perpendicular to the top surface 110 of the electrode 107. In an alternative embodiment, the first face 191 and the second face 192 of the fin 120 extend from the top surface 110 of the electrode 107 at other than right angles.

The fin core 122 of the fin 120 is spot welded to the metallic mesh 114 comprising the electrode 107. In another embodiment, the fin 120 may be composed entirely of a polymeric material and attached to the electrode 107 by means known in the art.

FIG. 14(c) illustrates in detail a section of the lead 21 of this embodiment. The lead 21 comprises an electrically insulating sheath 141 and an electrical conductor 142.

The electrically insulating sheath 141 is disposed around the electrical conductor 142 (phantom view). The electrically insulating sheath 141 prevents the cardioversion/defibrillation energy passing through the electrical conductor 142 to the electrode from passing into objects surrounding the lead 21. The electrically insulating sheath 141, comprises a tube 149 disposed around the electrical conductor 142. The tube is composed of either silicone, polyurethane or composite materials. One skilled in the art will recognize that the tube 149 could alternately be composed of any insulating, flexible, bio-compatible material suitable to this purpose.

In this embodiment, the electrical conductor 142 comprises three highly-flexible, highly-conductive coiled fibers known as filars 147 (phantom view). These fibers are wound in a helical shape through the electrically insulating sheath 141. In an alternate embodiment, the filars lie as linear cables within the electrically insulating sheath 141. In another alternate embodiment, a combination of helically coiled and linear filars lie within the electrically insulating sheath 141.

FIG. 14(d) illustrates a cross-section of a filar 147. The filars 147 of the embodiment illustrated comprise a metal core

144, a metal tube 143 and an insulating coating 140. The metal tube 143 is disposed around the metal core 144. The insulating coating 140 is disposed around the metal tube. The metal core 144 is made of silver and the metal tube 143 is made of MP35N<sup>®</sup> stainless steel, a product of SPS Technologies of Jenkintown, PA. The insulating coating 140 is made of teflon. The filars 147 of this structure are available as DFT<sup>™</sup> (drawn filled tube) conductor coil, available from Fort Wayne Metals Research Products Corp. of Fort Wayne, Indiana.

In an alternative embodiment, the filars 147 further comprise an intermediate coating (not shown) disposed between the metal tube 143 and the insulating coating 140. This intermediate coating is made of platinum, iridium ruthenium, palladium or an alloy of these metals.

In another alternative embodiment, the filars 147 comprise DBS<sup>™</sup> (drawn braised strands) also available from Fort Wayne Metals Research Products Corp. of Fort Wayne, Indiana.

Turning now to FIG. 14(e), a cross section of the lead fastener 146 is shown in detail. The lead fastener 146 provides a robust physical and electrical connection between the lead 21 and the electrode 107.

In this embodiment, the lead fastener 146 comprises a metal strip 157, a crimping tube 154 and a crimping pin 156. The metal strip 157 has a first end 150, a second end 151, and a middle portion 152. The first end 150 and second end 151 of the metal strip 157 are separated by the middle portion 152. The first end 150 and second end 151 of the metal strip 157 are attached to the electrode 107. In this embodiment, the first end 150 and second end 151 of the lead fastener 146 are spot welded to the top surface 110 of the metallic mesh 114 comprising the electrode 107. In other embodiments, other fastening methods known in the art can be used.

The middle portion 152 of the metal strip 157 is raised away from the electrode 107 to permit the crimping tube 154 and electrically insulating sheath 141 of the lead 21 to fit between the metal strip 157 and the electrode 107.

The middle portion 152 of the metal strip 157 contains a crimp point 148. The crimp point 148 squeezes the crimping tube 154 and electrically insulating sheath 141 of the lead 21 thereby gripping it, and thereby providing a robust structural connection between the lead 21 and the electrode 107.

The filars 147 of the lead 21 are situated between the crimping tube 154 and crimping pin 156. The crimping tube 154 has a crimping point 155 which causes the filars 147 to be squeezed between crimping tube 154 and crimping pin 156. A gap 5 159 in the electrically insulating sheath 141 allows the crimping tube 155 to make contact the electrode 107, thereby forming a robust electrical connection.

10 The metal strip 157, the crimping tube 154 and crimping pin 156 are each made of platinum iridium. In an alternative embodiment, the metal strip 157, crimping tube 154 and crimping pin 156 are each made of a metal selected from the group consisting essentially of titanium, nickel alloys, stainless steel alloys, platinum, platinum iridium, and mixtures thereof. 15 In an alternative embodiment, the metal strip 157, crimping tube 154 and crimping pin 156 are each made of any conductive material.

20 FIG. 14(f) illustrates an exploded view of the lead fastener 146. In other embodiments, other types of lead fasteners 146 known in the art are used.

FIG. 15(a) illustrates an alternative embodiment of the lead electrode assembly 100. This embodiment is substantially

similar to the lead electrode assembly 100 illustrated in FIGS. 14(a)- 14(f). In this embodiment, however, the appendage 118 lacks a fin core 122. Moreover, as seen in FIG. 15(a) the lead electrode assembly 100 of this embodiment further comprises a backing layer 130 and stitching 139. The backing layer 130 acts to insulate the electrode 107 so that cardioversion/defibrillation energy may not pass to the tissue of the patient that surrounds the top surface 110 of the electrode 107. This has the effect of focusing the cardioversion/defibrillation energy toward the heart of the patient through the bottom surface 115 of the electrode 107.

The backing layer 130 comprises a base portion 158 and an integrated fin 120. The base portion 158 of the backing layer 130 comprises a first surface 131, a second surface 132, a first side 133 and a second side 134.

The base portion 158 of the backing layer 130 is attached to the electrode 107 such that the second surface 132 of the backing layer 130 lies directly adjacent to the top surface 110 of the electrode 107.

The base portion 158 of the backing layer 130 is formed so that the first side 133 and the second side 134 are

substantially parallel and of substantially the same size as the first pair of sides 108 of the electrode 107.

FIG. 15(b) illustrates a top view of the lead electrode assembly 100 of this embodiment. The base portion 158 of the backing layer 130 further comprises a distal end 137 and a proximal end 138.

The distal end 137 and proximal end 138 of the backing layer 130 are parallel to and of substantially the same size as the second pair of sides 109 (hidden) of the electrode 107. The backing layer 130 contains a notch 136 on its distal end 137, through which the lead fastener 146 rises.

The base portion 158 of the backing layer 130 is attached to the electrode 107 with stitching 139. The stitching is composed of nylon. In alternate embodiments, the stitching is composed of any polymeric material.

The backing layer 130 is composed of polyurethane. In an alternative embodiment, the backing layer is composed of molded silicone, nylon, or Dacron®. In alternative embodiments, the backing layer is composed of any polymeric material.



The integrated fin 120 of the backing layer 130 is formed from the same piece of material as the backing layer 130. The integrated fin 120 has the same shape and dimensions as the fin 120 of the embodiment in FIG. 14.

5

In one embodiment, the integrated fin 120 is reinforced with a layer of Dacron® polymer mesh attached to the integrated fin 120. In another embodiment, the integrated fin 120 is reinforced with a layer of any polymeric material.

FIG. 16(a) illustrates an alternative embodiment of the lead electrode assembly 100. This embodiment is substantially similar to the lead electrode assembly 100 illustrated in FIGS. 14(a)-14(e). In this embodiment, however, the fin 120 has a different construction.

Here, fin 120 comprises a first fin section 165, a second fin section 160 and stitching 168. The first fin section 165 is a rectangular sheet of polymeric material comprising an inside face 167, an outside face 166, a first side 175 and a second side 174. The first side 175 and second side 174 of the first fin section 165 are substantially parallel and of substantially the same size.

A line 173 divides the first fin section 165 into a first half 171 and a second half 172. The line 173 runs parallel to the first side 175 of the first fin section 165. The first half 171 of the first fin section 165 lies on one side of line 173. 5 The second half 172 of the first fin section 165 lies on the other side of the line 173.

10 The second fin section 160 is a rectangular sheet of polymeric material of the same size as the first fin section 165 comprising an inside face 162 and an outside face 161. The second fin section 160 is divided in half substantially similarly to the first fin section 165, thereby forming a first half 163 and a second half 164 of the second fin section 160.

15 In an alternate embodiment, the first fin section 165 and second fin section are not rectangular in shape. In an alternate embodiment, the first fin section 165 and second fin section have an oval shape.

20 The first half 171 of the first fin section 165 is fastened to the first half 163 of the second fin section 160. The inside face 167 of the first half 171 of the first fin section 165 faces the inside face 162 of the first half 163 of the second

fin section 160. The first fin section 165 is fastened the second fin section 160 with stitching 168.

5 The fin 120 is attached to the top surface 110 of the electrode 107. To accomplish this, the second half 172 of the first fin section 165 is attached to the top surface 110 of the electrode 107 with the stitching 169. The second half 164 of the second fin section 160 is similarly attached to the top surface 110 of the electrode 107 with stitching (not shown).

10 In one embodiment, the fin 120 is reinforced with a layer of Dacron® polymer mesh positioned between the first fin section 165 and the second fin section 160 of the integrated fin 120. In another embodiment, the Dacron® polymer mesh is attached only to the first fin section 165 or the second fin section 160. In other embodiments, the integrated fin 120 is reinforced with a layer of any polymeric material attached to either or both fin sections.

20 The appendage height of the fin 120 in this embodiment is approximately 5 mm. In alternative embodiments, the appendage heights range between approximately 1 mm and approximately 10 mm. The appendage length of the fin 120 in this embodiment is

approximately 1 cm. In alternative embodiments, appendage lengths range between approximately 2 mm and approximately 6 cm. In one embodiment, the appendage length of the fin 120 is such that the fin 120 is substantially as long as the electrode 107.

5

FIG. 17(a) illustrates a side plan view of an alternative embodiment of the lead electrode assembly 100. The lead electrode assembly 100 comprises a connector 111, a lead 21, a lead fastener 146, an electrode 107, a backing layer 130 with an integrated fin tab 180, a molded cover 220 and an appendage 118.

The connector 111 is connected to the lead 21. The lead 21 is further connected to the electrode 107 with the lead fastener 146. The backing layer 130 is positioned over the electrode 107. The fin tab 180 protrudes from the backing layer 130. The molded cover 220 is disposed around the lead fastener 146 and the backing layer 130. The molded cover 220 is further disposed around the fin tab 180 of the backing layer 118 to form the appendage 118. The molded cover 220 also partially envelops the electrode 107.

The connector 111 and the lead 21 are substantially similar to the connector 111 and the lead 21 described with reference to FIGS. 14(a)-14(f). The lead comprises a distal end 101 and a

proximal end 102. The distal end 101 of the lead 21 is attached to the connector 111. The proximal end 102 of the lead 21 is connected to the electrode 107 by the lead fastener 146.

5 In this embodiment, the lead fastener 146 comprises a first crimping tube 200, a crimping pin 202 and a second crimping tube 201. The first crimping tube 200 connects the proximal end 102 of the lead 21 to the crimping pin 202. The second crimping tube 201 connects the crimping pin 202 to the electrode 107.

The electrode 107 comprises a distal end 103 (phantom view), a proximal end 104, a top surface 110 and a bottom surface 115. The electrode further comprises three sections: a main body 217, a mandrel 219 and a mandrel neck 218.

The main body 217 of the electrode 107 is the region of the electrode 107 that makes contact with the tissue of the patient and transfers the cardioversion/defibrillation energy to the patient. This region is substantially rectangular, comprising a first pair of sides 108 (not shown) and a second pair of sides 109. The first pair of sides 108 of the electrode 107 are substantially parallel to each other. The second pair of sides 109 of the electrode 107 are also substantially parallel to each other. In another embodiment, the first pair of sides 108 and

the second pair of sides 109 of the electrode 107 are non-parallel. The main body 217 of the electrode 107 is positioned under the backing layer 130, so that the top surface 110 of the electrode faces the backing layer 130.

5

The mandrel 219 is a region of the electrode 107 shaped to facilitate the connection of the electrode 107 to the lead 21 via the lead fastener 146. The mandrel of the electrode is crimped onto to the crimping pin 202 of the lead fastener 146 with the second crimping tube 201, so that a robust physical and electrical connection is formed. The main body 217 of the electrode 107 is connected to the mandrel 219 of the electrode 107 via the mandrel neck 218 of the electrode 107.

The backing layer 130 comprises a base portion 158 and an integrated fin tab 180. The base portion 158 of the backing layer 130 comprises a first surface 131, a second surface 132, a distal end 137 and a proximal end 138.

20

The base portion 158 of the backing layer 130 is positioned such that its second surface 132 is adjacent to the top surface 110 of the electrode 107. The base portion 158 of the backing layer 130 is sized and positioned so that the distal end 137 and proximal end 138 of the base portion 158 of the backing layer

130 overlay the second pair of sides 109 of the main body 217 of the electrode 107. The distal end 137 and proximal end 138 of the are also substantially parallel and of substantially the same size as the second pair of sides 109 of the electrode 107.

5

The integrated fin tab 180 of the backing layer 130 is formed from the same piece of material as the base portion 158 of the backing layer 130. The integrated fin tab 180 is formed on the first surface 131 of the base portion 158 of the backing layer 130.

The integrated fin tab 180 comprises a proximal edge 183, a distal edge 184, a top 185 and a bottom 186. The bottom 186 of the integrated fin tab 180 is joined to the first surface 131 of the base portion 158 of the backing layer 130. The proximal edge 183 and the distal edge 184 of the integrated fin tab 180 extend from, and substantially perpendicular to the first surface 131 of the base portion 158 of the backing layer 130. The proximal edge 183 and distal edge 184 of the integrated fin tab 180 are parallel with each other. The integrated fin tab 180 is positioned so that its proximal edge 183 is substantially flush with the proximal end 138 of the base portion 158 of the backing layer 130.

The backing layer 130 is composed of polyurethane. In an alternative embodiment, the backing layer 130 is composed of silicone. In another alternative embodiment, the backing layer 130 is composed of any polymeric material.

5

The molded cover 220 envelops and holds together the components of the lead electrode assembly 100. The molded cover 220 also provides rigidity to the lead electrode assembly 100. The molded cover 220 envelops the lead fastener 146 and the backing layer 130. The fin 120 is formed when the molded cover 220 covers the fin tab 180. The thickness of the resulting fin 120 is approximately 2 mm. In alternate embodiments, the thickness of the fin 120 is between approximately 1 mm and approximately 3 mm.

The appendage height of the fin 120 in this embodiment is approximately 5 mm. In alternative embodiments, the appendage heights range between approximately 1 mm and approximately 10 mm. The appendage length of the fin 120 in this embodiment is approximately 1 cm. In alternative embodiments, appendage lengths range between approximately 2 mm and approximately 6 cm. In one embodiment, the appendage length of the fin 120 is such that the fin is as long as the backing layer. In one embodiment, the appendage length of the fin 120 is such that the



fin is as long as the electrode 107. In one embodiment, the appendage length of the fin 120 is such that the fin is as long as the molded cover 220.

5 The molded cover 220 also partially covers the bottom surface 115 of the electrode 107. In this way, the molded cover 220 attaches the backing layer 130 to the electrode 107.

10 The molded cover 220 in this embodiment is made of silicone. In an alternate embodiment, the molded cover 220 is made of any polymeric material. Stitching 360 holds the molded cover 220, the electrode 107 and the backing layer 130 together.

15 In one embodiment, the fin 120 is reinforced with a layer of Dacron® polymer mesh positioned between the molded cover 220 and the integrated fin tab 180. In another embodiment, the Dacron® polymer mesh is attached only to the molded cover 220. In other embodiments, the fin 120 is similarly reinforced with a layer of any polymeric material.

20

As shown in FIG. 17(b), the fin 120 of the embodiment illustrated in FIG. 17(a) can alternately have a sloped shape. The sloped shape can reduce the resistance offered by the tissue of the patient as it slides against the fin 120 during the

insertion of the lead electrode assembly 100 into the patient. The slope-shaped fin 120 is constructed so that the proximal edge 183 and distal edge 184 of the integrated fin tab 180 are not parallel with each other. Instead, proximal edge 183 of the integrated fin tab 180 can be curved so that the proximal edge 183 of the integrated fin tab 180 is closer to the proximal edge 184 at the top 185 of the integrated fin tab 180, than at the bottom 186 of the integrated fin tab 180. In alternate embodiments, the proximal edge 183 of the integrated fin tab 180 is not curved. Instead, the proximal edge 183 of the integrated fin tab 180 is straight, and forms an acute angle with the first surface 131 of the backing layer 130. In one alternate embodiment, the proximal edge 183 of the integrated fin tab 180 forms a 45 degree angle with the first surface 131 of the backing layer 130. In alternate embodiments, the distal edge 184 of the integrated fin tab 180 is curved. In alternate embodiments, the distal edge 184 of the integrated fin tab 180 is straight and shaped so that it forms an acute angle with the first surface 131 of the backing layer 130.

20

FIG. 17(c) illustrates a front plan view of the lead electrode assembly 100 seen in FIG. 17(a). The base portion 158 of the backing layer 130 further comprises a first side 133 and second side 134. The first side 133 and second side 134 of the

base portion 158 of the backing layer 130 are substantially parallel. In an alternate embodiment, the first side 133 and second side 134 of the backing layer 130 are not parallel. The base portion 158 of the backing layer 130 is sized so that it is substantially the same size and shape as the main body 217 of the electrode 107.

10 The integrated fin tab 180 of the backing layer 130 is planar, comprising a first face 181 and a second face 182. The first face 181 and second face 182 of the fin tab 180 are substantially parallel with each other and with the first side 133 and second side 134 of the backing layer 130. The first face 181 and second face 182 of the fin tab 180 extend from, and substantially perpendicular to the first surface 131 of the backing layer 130. In another embodiment, the first face 181 and second face 182 of the fin tab 180 extend from the first surface 131 of the backing layer 130 at angles other than a right angle.

20 In an alternate embodiment, the first face 181 and a second face 182 of the integrated fin tab 180 of the backing layer 130 are not substantially parallel to each other. Instead, they are angled, such that they are closer together at the top 185 than they are at the bottom 186 of the integrated fin tab 180. This

shape can reduce the resistance offered by the tissue of the patient as it slides against the fin 120 during the insertion of the lead electrode assembly 100 into the patient.

5 In another embodiment, the first face 181 and a second face 182 of the integrated fin tab 180 of the backing layer 130 are angled, such that they are further apart at the top 185 than they are at the bottom 186 of the integrated fin tab 180. This shape can make the fin 120 easier to grip with a tool, such as a hemostat.

10 The fin tab 180 extends from the backing layer 130 at a position centered between the first side 133 and the second side 134 of the backing layer 130. In an alternate embodiment, the fin tab 180 is not centered between the first side 133 and the second side 134 of the backing layer 130.

15 An eyelet 301 is formed in the fin 120 of this embodiment. The eyelet can be used to facilitate the capture of the lead electrode assembly by a tool. The eyelet is formed as a hole 20 225 through the molded cover 220 and between the faces 181 and 182 of fin tab 180. In an alternate embodiment, no eyelet is formed in the fin 120.

The bottom surface 115 of the electrode 107 comprises a periphery 213 and a center 211. The molded cover 220 forms a skirt 222 around the periphery 213 of the bottom surface 115 of the electrode 107. The skirt 222 of the molded cover 220 covers the periphery 213 of the bottom surface 115 of the electrode 107.

10 The skirt 222 of the molded cover 220 can act to focus cardioversion/defibrillation energy emitted from the electrode 107 of the lead electrode assembly 100 toward the heart of the patient. Because the thorax of a patient is surrounded by a layer of fat that is somewhat conductive, the cardioversion /defibrillation energy may tend to arc through this layer to reach the active surface 15 of the canister 11 (seen in FIG. 1) without passing through the patient's heart. The skirt 222 of the lead electrode assembly 100 acts to minimize the loss of cardioversion /defibrillation energy to surrounding body tissues, or from being diverted away from the patient's heart.

20 The center 211 of the bottom surface 115 of the electrode 107 is not covered by the molded cover 220 and is left exposed. The width of the periphery 213 of the bottom surface 115 of the electrode 107 covered by the molded cover 220 is approximately .125 cm.

The area of the exposed center 211 of the bottom surface 115 of the electrode 107 is approximately 500 square mm. In alternative embodiments, the length of the first pair of sides 108 and the second pair of sides 109 of the electrode 107 vary, such that the area of the center 211 of the bottom surface 115 of the electrode has a surface area between approximately 100 sq. mm. and approximately 2000 sq. mm.

FIG. 17(d) illustrates an exploded top view of the lead fastener 146 of the embodiments illustrated in FIGS. 17(a)-17(c). The lead fastener connects the proximal end 102 of the lead 21 and the distal end 103 of the electrode 107.

In this embodiment, the lead fastener 146 comprises a first crimping tube 200, a crimping pin 202 and a second crimping tube 201. The crimping pin 202 comprises a first side 203 and a second side 204.

The crimping tube 200 crimps the filars 147 of the lead 21 (here, only one representative filar 147 is shown) to the first side 203 of crimping pin 202. The mandrel 219 of the electrode 107 is then wrapped around the second side 204 of the crimping

pin 202. Crimping tube 201 crimps the mandrel 219 to the second side 204 of the crimping pin 202.

The first crimping tube 200, the second crimping tube 201 and the crimping pin 202 are each made of platinum iridium. In an alternative embodiment, the first crimping tube 200, the second crimping tube 201 and the crimping pin 202 are each made of a metal selected from the group consisting essentially of titanium, nickel alloys, stainless steel alloys, platinum, platinum iridium, and mixtures thereof. In other embodiments, the first crimping tube 200, the second crimping tube 201 and the crimping pin 202 each comprise any conductive material.

The electrode 107 in this embodiment comprises a sheet of metallic mesh 206 prepared by the process described with reference to FIG. 14. The electrode 107 has a width measured parallel to the second pair of sides 109 of the electrode 107. The width of the mandrel neck 218 of the electrode 107 is approximately 3 mm wide. The width of the mandrel of the electrode 107 is approximately 5 mm wide.

The first pair of sides 108 of the electrode 107 are approximately 5 cm in length. The second pair of sides 109 of the electrode 107 are approximately 1.9 cm in length. In

alternative embodiments, the length of the first pair of sides 108 and the second pair of sides 109 of the electrode 107 range independently from approximately 1 cm to approximately 5 cm.

5       The electrode 107 of this embodiment further comprises four corners 112. The corners 112 of the electrode 107 are rounded. In an alternate embodiment, the corners 112 of the electrode 107 are not rounded.

10       FIGS. 17(e)-17(g) illustrate the size and position of the fin 120 on the molded cover of the lead electrode assembly 100.

15       FIGS. 18(a)-18(c) illustrate an alternative embodiment of the lead electrode assembly 100. This embodiment is substantially similar to the embodiments illustrated in FIGS. 17(a)-17(g). In this embodiment, however, the appendage height of the fin 120 is approximately 1 cm. The appendage length of the fin 120 in this embodiment is approximately 3.5 cm.

20       As shown in FIG. 18(a), stitching 302 is placed through the molded cover 220 and the fin 120 to prevent the molded cover 220 from sliding off the fin tab 180 when the molded cover 220 is subjected to a force directed away from the electrode 107.



As shown in FIG. 18(c), the fin 120 (phantom view) extends approximately two thirds of the length of the electrode 107.

FIG. 19 illustrates an alternative embodiment of the lead electrode assembly 100. This embodiment is substantially similar to the embodiments illustrated in FIGS. 17(a)-17(g). In this embodiment, however, the backing layer 130 (not shown) inside the molded cover 220 is curved. This results in an electrode 107 that has a curvature of radius  $r$ , such that the bottom surface 115 of the electrode 107 is concave.

Because a curved electrode 107 may more closely approximate the curvature of the patient's ribs, this curvature may have the effect of making the lead electrode assembly 100 more comfortable for the patient. In one embodiment, the radius  $r$  of the curvature varies throughout the electrode 107 such that it is intentionally shaped to approximate the shape of the ribs. Lead electrode assemblies 100 can be custom manufactured with an electrode 107 with a curvature  $r$  that matches the curvature of the intended patient's ribcage in the vicinity of the ribcage adjacent to which the electrode 107 is to be positioned.

In an alternative embodiment, lead electrode assemblies 100 are manufactured with an electrode 107 with a radius  $r$  that

matches the curvature of the ribcage of a statistically significant number of people.

In another embodiment, lead electrode assemblies 100 with 5 electrodes 107 of varying curvatures can be manufactured to allow an electrode radius  $r$  to be selected for implantation based on the size of the patient. Smaller radii can be used for children and for smaller adult patients. Larger radii can be used for larger patients. The radius  $r$  of the curvature can range from approximately 5 cm to approximately 35 cm depending on the size of the patient.

In an alternative embodiment, the electrode 107 of the lead electrode assembly 100 is flexible, such that it can be bent to conform to the curvature of the intended patient's rib cage at the time of implantation.

FIGS. 20(a)-20(c) illustrate an alternative embodiment of the lead electrode assembly 100. This embodiment is substantially similar to the embodiments illustrated in FIGS. 17(a)-17(g). In this embodiment, however, the backing layer 130 lacks an integrated fin tab 180 mounted on the first surface 131 of the backing layer 130. Moreover, this embodiment further comprises a backing layer 400 having a fin tab 405.

FIGS. 20(a) and 20(b) illustrate only the backing layer 400, the fin tab 405 and the electrode 107 of this embodiment as they are positioned relative to each other in the complete 5 embodiment. Other components of the embodiment are not shown. FIG. 20(c) shows the embodiment in a complete form.

FIG. 20(a) illustrates a top plan view of the backing layer 400 and the electrode 107. The backing layer 400 is positioned over the electrode 107. The electrode 107 of this embodiment is substantially similar to the electrode 107 of the embodiment illustrated in FIG. 17(d). In the complete embodiment, the mandrel 219 of the electrode 107 is joined to the lead 21 (not shown) by a lead fastener 146 (not shown) as shown in FIG. 17(a).

The backing layer 400 is a flat, planar member comprising a distal end 137 and a proximal end 138. The backing layer 400 further comprises a first side 133, a second side 134, a first 20 surface 131, and a second surface 132 (not shown). The backing layer 400 further comprises a width, W, measured as the distance between the first side 133 and the second side 134.

The backing layer 400 includes a fin tab 405 that is formed from the same piece of material as the backing layer 400. The first side 133 of the backing layer 400 lies over one of the first pair of sides 108 of the electrode 107 except over a fin tab region 407. In the fin tab region 407, the backing layer 400 is wider than the electrode 107. In the fin tab region 407, the first side 133 forms a fin tab 405 that protrudes from part of the first side 133 of the backing layer 400 outside the fin tab region 407. The fin tab 405 extends from the first side 133 of the backing layer 400 in an orientation substantially parallel to the top surface 110 of the electrode 107, beyond the first side 108 (phantom view) of the electrode 107.

The fin tab 405 comprises a first face 410 and a second face 411 (not shown). The first face 410 of the fin tab 405 is an extension of the first surface 131 of the backing layer 400. The second face 411 of the fin tab 405 is an extension of the second surface 132 of the backing layer 400.

Aside from the fin tab 405, the backing layer 405 is formed so that it is of substantially the same size and shape as the main body 217 of the electrode 107.

The backing layer 400, including the fin tab 405, is composed of polyurethane. In an alternate embodiments the backing layer 400 and fin tab 405 are composed of any polymeric material.

5

FIG 20(b) is a side plan view of the backing layer 400 and the electrode 107. The backing layer 400 is positioned over the electrode 107 such that the second surface 132 of the backing layer 400 is placed adjacent to the top surface 110 of the electrode 107.

10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186  
2187  
2188  
2189  
2190  
2191  
2192  
2193  
2194  
2195  
2196  
2197  
2198  
2199  
2200  
2201  
2202  
2203  
220

embodiments, the fin 424 is similarly reinforced with a layer of any polymeric material.

The appendage height,  $h_{\text{Appendage}}$ , of the fin 424 of this embodiment is approximately 5 mm. In alternative embodiments, the appendage heights range between approximately 1 mm and approximately 10 mm. The appendage length,  $L_{\text{Appendage}}$ , of the fin 424 of this embodiment is measured between the proximal end 404 and the distal end 403 of the fin 424.  $L_{\text{Appendage}}$  is measured where the fin 424 joins the rest of the lead electrode assembly 100. In this embodiment, the appendage length is approximately 1 cm. In alternative embodiments, the appendage lengths range between approximately 2 mm and approximately 6 cm. In one embodiment, the appendage length of the fin 424 is such that the fin 424 runs the length of the electrode 107. In one embodiment, the appendage length of the fin 424 is such that the fin 424 runs the length of the backing layer 130 (not shown). In one embodiment, the appendage length of the fin 424 is such that the fin 424 runs the length of the molded cover 220.

FIG. 20(d) illustrates a bottom plan view of an alternate embodiment of the lead electrode assembly 100. This embodiment is substantially similar to the lead electrode assembly 100 illustrated in FIGS. 20(a)-20(c). In this embodiment, however,

proximal end 404 of the fin 424 is sloped. The slope shape of the fin 424 is formed by the shape of the fin tab 405 (phantom view) inside the fin 424. The backing layer 400 gradually widens in the fin tab region 407 (not shown) with distance from the proximal end 138 (not shown) to the distal end 137 (not shown) of the backing layer 130 (not shown) until the appendage height is reached. The proximal end 404 of the fin 424 is straight and forms an acute angle with the first side 133 of the base portion 158 of the backing layer 130 (not shown). In an alternate embodiment, the proximal end 404 of the fin 424 forms a 45 degree angle with the first side 133 of the base portion 158 of the backing layer 130 (not shown). In another embodiment, the proximal end 404 of the fin 424 is curved slope.

In alternate embodiments, the distal end 403 of the fin 424 is straight and shaped so that it forms an acute angle with the first side 133 of the base portion 158 of the backing layer 130 (not shown). In alternate embodiments, the distal end 403 of the fin 424 is curved.

FIGS. 21(a)-21(c) illustrate an alternative embodiment of the lead electrode assembly 100. This embodiment is substantially similar to the embodiment illustrated in FIGS.

15(a)-15(b). The integrated fin 120 is absent, however, from the backing layer 130.

The lead electrode assembly 100 of this embodiment further comprises a cylindrical rod 500 having a loop 515 formed therein. The loop 515 comprises the appendage 118 of this embodiment. The loop 515 is a member attached to the electrode 107 that can be gripped and used to precisely locate the electrode 107 during its surgical implantation within the patient.

FIG. 21(a) illustrates a side plan view of the embodiment. The cylindrical rod 500 comprises a first straight portion 510, a second straight portion 512 and a portion formed into a loop 515. The first straight portion 510 is separated from the second straight portion 512 by the loop 515.

The rod 500 is made of platinum iridium. In an alternative embodiment, the rod 500 is made of titanium or platinum.

The first straight portion 510 and second straight portion 512 are spot welded to the top surface 110 of the electrode 107. The loop 515 in the rod 500 extends away from the top surface 110 of the electrode 107.



The backing layer 130 is similar to the backing layer 130 illustrated in FIGS. 15(a)-15(b). The backing layer 130 is disposed over the electrode 107. The first straight portion 510 and second straight portion 512 of the rod 500 are positioned between the second surface 132 of the backing layer 130 and the top surface 110 of the electrode 107.

FIG. 21(b) illustrates a cross-sectional rear plan view of the embodiment of the lead electrode assembly shown in FIG. 21(a). The first straight portion 510 and second straight portion 512 are positioned such that they are parallel to the first pair of sides 108 of the electrode 107. The first straight portion 510 and second straight portion 512 are both centered between the first pair of sides 108 of the electrode 107. In an alternative embodiment, the first straight portion 510 and second straight portion 512 are not parallel to and centered between the first pair of sides 108 of the electrode 107.

FIG. 21(c) illustrates a top plan view of the embodiment of the lead electrode assembly shown in FIG. 21(a). An aperture 517 is formed in the backing layer 130. The aperture 517 in the backing layer is positioned such that the loop 515 extends

through and beyond the aperture 517 in a direction away from the top surface 110 of the electrode 107. The backing layer 130 is attached to the electrode 107 with stitching 139.

5        FIGS. 22(a)-22(d) illustrate an alternative embodiment of the lead electrode assembly 100. This embodiment is substantially similar to the embodiment illustrated in FIGS. 15(a)-15(b). This embodiment comprises a backing layer 610, however, that lacks the integrated fin 120 illustrated in FIGS. 15(a)-15(b).

10        FIG. 22(a) illustrates a top plan view of the backing layer 610 of this embodiment prior to its attachment to the rest of the lead electrode assembly 100. The backing layer 610 is cut in a pattern as shown. The backing layer comprises a first surface 131, a second surface 132 (not shown), a distal end 137, a proximal end 138, a first side 133, a second side 134 and an indented fin-forming region 620. The indented fin-forming region 620 comprises a first edge 690 and a second edge 691.

20        The backing layer 610 is formed so that the first side 133 and the second side 134 are substantially parallel and of substantially the same size as the first pair of sides 108 of the electrode 107. The proximal end 138 is formed so that it is

substantially perpendicular to the first side 133 and the second side 134 of the backing layer 610. The proximal end 138 is longer than the second pair of sides 109 of the electrode 107 by a length A. The backing layer 610 has a varying width C measured from its distal end 137 to its proximal end 138 along a line parallel to its first side 133.

The backing layer is divided into three sections. A first backing section 693, a second backing section 692 and an indented fin-forming region 620 of length A. The length of the fin-forming region 620, A, is approximately 10 mm. In other embodiments, the length of the fin-forming region 620, A, ranges between approximately 2 mm and approximately 20 mm.

The area within the indented fin-forming region 620 is equally divided into a first fin area 612 and a second fin area 615. The dividing line 617 between the first fin area 612 and the second fin area 615 is substantially parallel to the first side 133.

The width, C, of the backing layer 610 is equal to the distance between the second pair of sides 109 of the electrode 107 except in the indented fin-forming region 620. In the indented fin-forming region 620, the width, C, of the backing

layer 610 is B. The width, B, of the backing layer 610 in the fin-forming region 620, is approximately 1 cm. In alternate embodiments, the width, B, of the backing layer 610 in the fin-forming region 620 ranges between approximately 2 mm and approximately 6 cm. In other embodiments, however, the fin-forming region 620 ranges between 2 mm and the width, C, of the backing layer 610. In other embodiments, the fin-forming region 620 is longer than the width, C, of the backing layer 610.

The variation in width between the areas inside and outside the indented fin-forming region 620, forms the first edge 690 and a second edge 691 of the fin-forming region 620.

A first notch 136(a) is formed on the distal end 137 the first edge 690 of the fin-forming region 620 of the backing layer 130. A second notch 136(b) is formed on the distal end 137 the second edge 691 of the fin-forming region 620 of the backing layer 130.

The backing layer 610 in this embodiment is formed of flexible silicone. In alternative embodiments the backing layer 610 is formed of any bio-compatible, flexible polymeric material.

FIG. 22(b) illustrates a top plan view of the lead electrode assembly 100 of this embodiment. The backing layer 610 is attached to the electrode 107, so that the first edge 690 and a second edge 691 of the fin-forming region 620 of the backing layer 610 meet. This causes the backing layer 610 in the first fin area 612 and the second fin area 615 to fold together to form a fin 120.

The first notch 136(a) and second notch 136(b) formed on the distal end 137 the first edge 690 and second edge 691 of the fin-forming region 620 of the backing layer 130 meet to form a notch 136 on the distal end 137 of the backing layer, through which the lead fastener 146 rises. Stitching 660 holds the backing layer to the electrode 107.

FIG. 22(c) illustrates a side plan view of the lead electrode assembly 100 of this embodiment. Stitching 660 holds the first fin area 612 and a second fin area 615 of the backing layer 610 together to form the fin 120.

FIG. 22(d) illustrates a front plan view of the lead electrode assembly 100 of this embodiment. In one embodiment, the fin 120 is reinforced with a layer of Dacron® polymer mesh positioned between the first fin area 612 and a second fin area

615. In another embodiment, the Dacron® polymer mesh is attached only to either first fin area 612 or the second fin area 615. In other embodiments, the fin 120 is similarly reinforced with a layer of any polymeric material.

5

FIGS. 22(e) and 22(f) illustrate an alternative embodiment of the lead electrode assembly 100. This embodiment is substantially similar to the embodiment illustrated in FIGS. 22(a)-22(d). The backing layer 610 is substantially similar to the backing layer 610 illustrated in FIG. 22(a). The backing layer 610 in this embodiment, however, is cut along line 617. The fin 120 of this embodiment comprises a proximal edge 129. The proximal edge 129 of the fin 120 is slope-shaped. The sloped shape can reduce the resistance offered by the tissue of the patient as it slides against the fin 120 during the insertion of the lead electrode assembly 100 into the patient.

10940356-052701  
10/22/00 9:55:04 AM

FIGS. 23(a) and 23(b) illustrate a property of the embodiment of the lead electrode assembly 100 illustrated in FIGS. 22(e) and 22(f). The backing layer 610 is flexible, such that the substantially planar fin 120 formed therefrom is flexible and able to fold. Because the ability of the fin 120 to fold effectively reduces its appendage height, it may make the fin more comfortable to the patient after it is implanted.

FIG. 23(a) shows fin 120 in an upright condition. When pressure is applied perpendicular to the first surface 131 of backing layer in the first fin area 612, along line 677 for example, the fin 120 folds as shown in FIG. 23(b). When the fin 120 folds, its appendage height,  $H_{\text{Appendage}}$ , is reduced. This can be seen by a comparison between FIG. 23(a) and FIG. 23(b).

The backing layer 610 in this embodiment is formed of a polymeric material. In an alternative embodiment, the backing layer 610 is formed of any bio-compatible, flexible polymeric material.

FIGS. 24(a)-24(c) illustrate an alternative embodiment of the lead electrode assembly 100. This embodiment is substantially similar to the embodiment illustrated in FIGS. 22(a)-22(d).

As shown in FIG. 24(a), however, the material from the first fin area 612 and the second fin area 615 of the backing layer 610 is not fastened together with stitching 660 in this embodiment. The resulting appendage 118 is formed in the shape of a tube.

In alternate embodiments, the backing layer 610 is coupled to the electrode 107 such that the material from the first fin area 612 and the second fin area 615 of the backing layer 610 does not touch except at the dividing line 617 between the first  
5 fin area 612 and the second fin area 615. The separation between the first fin area 612 and the second fin area 615 of the backing layer 610 can allow the appendage 118 of this embodiment to be highly flexible. This flexibility can reduce the resistance offered by the tissue of the patient as it slides  
10 against the appendage 118 during the insertion of the lead electrode assembly 100 into the patient.

FIG. 24(b) illustrates a side plan view of the embodiment illustrated in FIG. 24(a). The appendage 118 of this embodiment comprises a proximal edge 129. The proximal edge 129 of the  
15 appendage 118 is slope-shaped. The sloped shape can reduce the resistance offered by the tissue of the patient as it slides against the appendage 118 during the insertion of the lead electrode assembly 100 into the patient.

In alternate embodiments, the proximal edge 129 of the tube formed by the appendage 118 is closed. In one embodiment, the proximal edge 129 of the appendage 118 is closed by a cap (not shown). In another embodiment, the proximal edge 129 of the



appendage 118 is closed with stitching placed between the first fin area 612 and the second fin area 615 only at the proximal edge 129 of the appendage 118. In another embodiment, the proximal edge 129 of the appendage 118 is closed by any other means known in the art for this purpose.

FIG. 24(b) illustrates a top plan view of the embodiment illustrated in FIGS. 24(a)-24(b).

FIGS. 25(a)-25(d) illustrate an alternative embodiment of the lead electrode assembly 100. This embodiment is substantially similar to the embodiment illustrated in FIGS. 15(a)-15(b). The backing layer 130 of this embodiment, however, lacks an integrated fin 120.

FIG. 25(a) illustrates a front plan view of the lead electrode assembly. The fin 120 in this embodiment comprises a fin head 700 and flexible joining material 702.

The fin head 700 comprises a rectangular sheet having a first face 705, a second face 706, a first end 710 and a second end 712. The fin head 700 further comprises a height measured along the first face 705 between the first end 710 and the

second end 712 and a length measured perpendicular to its height.

The fin head 700 is made of rigid silicone, which has a 5 high durometer. In alternate embodiments, the fin head 700 is composed of any rigid bio-compatible material, such as a rigid bio-compatible polymeric material.

10 The flexible joining material 702 comprises a rectangular  
15 sheet having a first face 720, a second face 721, a first end  
718 and a second end 719. The flexible joining material 702  
further comprises a height measured along the first face between  
the first end 718 and the second end 719. The flexible joining  
material 702 also comprises a length measured perpendicular to  
its height. The length of the flexible joining material 702 is  
the same as the length of fin head 700.

20 The second end 712 of the second face 706 of the fin head  
700 is attached to the first end 718 of the first face 720 of  
the flexible joining material 702. The fin head 700 is attached  
to the flexible joining material 702 with stitching 725. The  
second end 719 of the first face 720 of the flexible joining  
material 702 is attached to the first surface 131 of the backing

material 130. The flexible joining material 702 is attached to the backing material 130 with stitching 730.

The flexible joining material 702 is made of flexible  
5 silicone. It will be recognized by one skilled in the art, however, that the flexible joining material 702 may be made from many other flexible materials, such as a flexible polymeric material.

10 FIG. 25(b) illustrates a property of the fin 120. When pressure is applied perpendicular to the first surface 705 of the fin head 205, the fin 120 folds as shown. When the fin 120 folds, its appendage height,  $H_{\text{Appendage}}$ , is reduced. This can be seen by a comparison between FIG. 25(a), which shows the fin 120 in an upright position and FIG. 25(b) which shows the fin 120 in a folded position.

15 FIG. 25(c) illustrates a top planar view of the lead electrode assembly 100 of the embodiment illustrated in FIGS.  
20 25(a) and 25(b). Neither the corners of the electrode 107 nor the corners 735 of the backing layer 130 of this embodiment are rounded. In an alternate embodiment, both the corners of the electrode 107 and the corners 735 of the backing layer 130 of this embodiment are rounded.

FIG. 26 illustrates an alternative embodiment of the lead electrode assembly 100. This embodiment is substantially similar to the embodiment illustrated in FIGS. 25(a)-25(d). The backing layer 130 of this embodiment, however, lacks a fin head 700 and flexible joining material 702.

Moreover, the appendage 118 in this embodiment comprises a tube 740 having an interior 755, an exterior 756, a proximal end 757 and a distal end 758. The tube comprises a sheet of material 750. The sheet of material 750 is substantially rectangular having a first pair of sides 751, a second pair of sides 752, a first surface 753 and a second surface 754.

The sheet of material 750 is folded so that its first pair of sides 751 abut each other. The folded sheet of material 750 forms a tube 740. The first surface 753 of the sheet of material 750 faces the interior 755 of the tube 740. The second surface 754 of the sheet of material 750 faces the exterior of the tube 756. In folding the sheet of material 750 so that the first pair of sides 751 abut each other, the second pair of sides 752 of the sheet of material 750 are folded in a circular shape to form the proximal end 757 and distal end 758 of the tube 740. This results in the tube 740 having a cylindrical

shape. The diameter of the circular proximal end 757 and distal end 758 of the tube 756 is approximately 5 mm. In alternate embodiments, the diameter range between approximately 1 mm and approximately 10 mm. The length of the tube 756 as measured between the proximal end 757 and distal end 758 of the tube 756 is approximately 1 cm. In alternate embodiments, length of the tube 756 ranges between approximately 2 mm and approximately 6 cm. In one embodiment, the tube 756 is substantially as long as the electrode 107.

The second surface 754 of the sheet of material 750 is attached to the first surface 131 of the backing layer 130. The first pair of sides 751 of the sheet of material 750 are attached to the backing layer 130 with stitching 760.

In alternate embodiments, the proximal end 757 of the tube 740 is closed. In one embodiment, the proximal end 757 of the tube 740 is closed by a cap (not shown). In another embodiment, the proximal end 757 of the tube 740 is closed by holding one of the second pair of sides 752 of the sheet of material 750 closed with stitching. In another embodiment, the proximal end 757 of the tube 740 is closed by any other means known in the art for this purpose.

It should be noted that the appendage 118 in some alternative embodiments comprises a tube with a shape other than a cylinder. An example of a tube with a shape other than cylindrical is illustrated below in FIG. 27.

5

FIG. 27 illustrates an alternative embodiment of the lead electrode assembly 100. This embodiment is substantially similar to the embodiment illustrated in FIG. 26. The tube 740 comprising a sheet of material 750, however, is absent from this embodiment.

10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186  
2187  
2188  
2189  
2190  
2191  
2192  
2193  
2194  
2195  
2196  
2197  
2198  
2199  
2200  
2201  
2202  
2203  
2204  
2205  
2206  
2207

embodiment, the second pair of sides 786 of each sheet of material are non-parallel.

The first pairs of sides 784 of each sheet of material are  
5 attached to the first pair of sides 784 of the other sheets of material. In this way the second pair of sides 786 of the first sheet of material 775, the second sheet of material 776 and the third sheet of material 777 form a triangular shaped proximal end 757 and distal end 758 of the tube 770. The sheets of  
10 material are attached to each other such that the second surface 789 of each sheet of material faces the interior 755 of the tube 770. The sheets of material are attached to each other with stitching 791.

1 The height of the tube 770 is approximately 5 mm. In alternate embodiments, the height ranges between approximately 1 mm and approximately 10 mm. The length of the tube 770 as measured between the proximal end 757 and distal end 758 of the tube 770 is approximately 1 cm. In alternate embodiments,  
20 length of the tube 770 ranges between approximately 2 mm and approximately 6 cm. In one embodiment, the tube 770 is substantially as long as the electrode 107.

The second sheet of material 776 is attached to the backing layer 130 with stitching 790. The first surface 788 of the second sheet of material 776 is positioned next to the first surface 131 of the backing layer 130.

5

In alternate embodiments, some or all of the sheets of material are reinforced with a layer of Dacron® polymer mesh. In one embodiment, the Dacron® polymer mesh is attached to the first surface 788 of each sheet of material. In another embodiment, the Dacron® polymer mesh is attached to the second surface 789 of each sheet of material. In another embodiment, the sheets of material are similarly reinforced with a layer of any polymeric material.

10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186  
2187  
2188  
2189  
2190  
2191  
2192  
2193  
2194  
2195  
2196  
2197  
2198  
2



FIGS. 28(a)-28(d) illustrate various possible positions for the appendage 118 relative to the lead 21 of the lead electrode assembly 100. Additionally, up to this point, all embodiments of the electrode 107 illustrated and discussed have had a rectangular shape. These figures illustrate alternative embodiments with electrodes 107 of different shapes.

At this point, it is useful to set out two definitions in order to discuss the possible orientation of appendages 118.

The interface line is defined as the center line of the appendage 118 as traced on the electrode 107. FIG. 28(a) illustrates the interface line 800 of the appendage 118 of a lead electrode assembly 100.

The line of the lead is defined as the line along which the lead 21 of the lead electrode assembly 100 enters the lead fastener 146. The line of the lead 805 of line 21 is shown as it enters the lead fastener 146 (in phantom). As the lead 21 approaches the lead fastener 146, the closest section 807 of the lead 21 forms the line of the lead. When the lead 21 is not bent, the entire lead 21 lies along the line of the lead.

FIG. 28(b) illustrates an embodiment wherein the lead 21 is not bent and the entire lead 21 lies along the line of the lead 805.

5 The electrode length,  $L_{\text{Electrode}}$ , is the length of the electrode 107 as measured along the interface line 800.

10 In the embodiments of the lead electrode assembly 100 shown in FIGS. 28(b) and 28(c), the interface line 800 is the same line as the line of the lead 805. In the embodiment shown in FIG. 28(a) the interface line 800 is parallel with the line of the lead 805.

15 In the embodiment of the lead electrode assembly 100 shown in FIG. 28(d), the interface line 800 intersects the lead fastener 146 (phantom view).

20 FIGS. 28(e)-28(h) show various additional electrode shapes disposed in various lead electrode assemblies 100. The electrode shapes are not limited, however, to the shapes specifically illustrated.

The electrode 204 depicted in FIG. 28(e) has a "thumbnail" shape. The proximal end 104 of this electrode 107 is generally

rounded. As the electrode 107 moves distally along its length, the conductive surface terminates at the distal end 103 of the electrode 107.

5 An ellipsoidal shaped electrode 107 is depicted in FIG. 28(f). The proximal end 104 of the ellipsoidal shaped electrode 107 is generally rounded. As the ellipsoidal shaped electrode 107 moves distally along its length, the conductive surface terminates in a rounded distal end 103.

10 A circular shaped electrode 107 is illustrated in FIG. 28(g).

15 A triangular shaped electrode 107 is depicted in FIG. 28(h). Triangular shaped electrodes 107 also incorporate electrodes that are substantially triangular in shape. In particular to FIG. 28(h), the corners of the triangular shaped electrode 107 are rounded.

20 Several lead electrode assembly manipulation tools 927 have been developed to manipulate the lead electrode assemblies during their surgical implantation.

5 during their implantation in patients.

**10**

20 In one embodiment, the curvature of the hemostat approximates the curvature of the thorax of a patient along a subcutaneous path taken from the anterior axillary line, posteriorly toward the spine.

The first prong 931 is pivotally attached to the second prong 932 by the hinge 939. The hinge is attached to the first prong 931 approximately 10 cm from the first end 933. In this embodiment, the hinge is attached to the second prong 932 approximately 10 cm from the second end 935.

10 The eyelet pin 940 can be inserted through the eyelet 301 of a fin 120 of the lead electrode assembly 100 such as the lead electrode assembly 100 discussed with reference to FIG. 17(a)-17(g) as a means of capturing the lead electrode assembly 100 prior to its implantation in a patient.

15 The eyelet pin 940 is a cylindrical member having a first end 941 and a second end 942. In an alternate embodiment, the eyelet pin 940 is a hook-shaped member. The diameter of the cylinder is approximately 2 mm. In alternate embodiments, the diameter of the cylinder ranges from approximately 1 mm to approximately 5 mm. The length of the eyelet pin 940 is approximately 8 mm. In alternate embodiments, the length of the eyelet pin 940 ranges from approximately 4 to approximately 15 mm.

The first end of the eyelet pin 940 is attached to the second prong 932, approximately 8 mm from the second end 936 of

the second prong 932. In alternate embodiments, the eyelet pin 940 is attached to the second prong 932 at various lengths from the second end 936 of the second prong 932.

5       The eyelet pin 940 is attached to the second prong 932 in an orientation perpendicular to the length of the second prong 932. The eyelet pin 940 is attached to the second prong 932 so that it extends away from the second end 934 of the first prong 931.

10       In this embodiment, all of the components are made of stainless steel. In an alternative embodiment, some or all of the components are composed metals other than stainless steel or are composed of a polymeric material.

15       We now turn to a discussion of the positions of the components that comprise an entire S-ICD system including the lead electrode assembly 100 when it is implanted in a patient.

20       FIGS. 30(a) and 30(b) illustrate an embodiment of the S-ICD system implanted in a patient as a means of providing cardioversion/defibrillation energy.

FIG. 30(a) is a perspective view of a patient's ribcage with an implanted S-ICD system. The S-ICD canister 11 is implanted subcutaneously in the anterior thorax outside the ribcage 1031 of the patient, left of the sternum 920 in the area over the fifth rib 1038 and sixth rib 1036. The S-ICD canister 11, however, may alternately be implanted anywhere over the area between the third rib and the twelfth rib. The lead 21 of the lead electrode assembly 100 is physically connected to the S-ICD canister 11 where the transthoracic cardiac pacing energy or effective cardioversion/defibrillation shock energy (effective energy) is generated. The term "effective energy" as used in this specification can encompass various terms such as field strength, current density and voltage gradient.

The lead 21 of the lead electrode assembly 100 travels from the S-ICD canister 11 to the electrode 107, which is implanted subcutaneously in the posterior thorax outside the ribcage 1031 of the patient in the area over the eighth rib 1030 and ninth rib 1034. The electrode 107, may alternately be implanted subcutaneously anywhere in the posterior thorax outside the ribcage 1031 of the patient in the area over the third rib 1030 and the twelfth rib 1034. The bottom surface 115 of the electrode 107 faces the ribcage. The electrode or active

surface 15 (phantom view) of the canister 11 also faces the ribcage.

FIG. 30(b) is a cross-sectional side plan view of the patient's rib cage. Here it is seen that the lead 21 travels around the circumference of the thorax, in the subcutaneous layer beneath the fat 1050 between the outside of the ribcage 1031 and the skin 1055 covering the thorax.

We now turn to a discussion of a method by which the lead electrode assembly 100 of the S-ICD system is implanted in a patient using a standard hemostat as well as the enhanced hemostat described above. FIG. 31 and FIGS. 32(a)-32(d) illustrate aspects of this method.

In operation, as seen in FIG. 31, an incision 905 is made in the patient 900 in the anterior thorax between the patient's third and fifth rib, left of the sternum 920. The incision can alternately be made in any location between the patient's third and twelfth rib. The incision can be made vertically (as shown), horizontally or angulated. In order to minimize scarring, the incision can be made along Langher's lines.



FIG. 32(a) shows a bottom view cross-section of the patient 900, along the line 32(a) shown in FIG. 31. A hemostat 930, with prongs 932 is introduced into the incision 905. The hemostat 930 is inserted with its prongs together without anything gripped between them. The prongs 932 of the hemostat 930 are pushed through the fat 1050 between the skin 1055 of the thorax and the ribcage 1031 to create a subcutaneous path 1090. The prongs 932 of the hemostat 930 can alternately be pushed beneath the fat 1050 that lies between the skin 1055 of the thorax and the ribcage 1031 to create a subcutaneous path 1090 between the fat 1050 and the ribcage 1031.

The hemostat is moved around the ribcage 1031 until the subcutaneous path 1090 reaches within approximately 10 cm of the spine 1035 between the eighth rib 1030 and ninth rib 1034 (this location is best seen in FIG. 30(a)) between the skin 1055 and the ribcage 1031. The subcutaneous path 1090 can alternately be made to reach any location between the skin 1055 and the ribcage 1031 between the patient's third and twelfth rib. The hemostat 930 is then withdrawn. Alternately, the hemostat 930 can be moved around the ribcage 1031 until the subcutaneous path 1090 terminates at a termination point 1085 at which a line 1084 drawn from the termination point 1085 to the incision 905 would intersect the heart 910.

Next, as shown in FIG. 32(b), the appendage 118 of a lead electrode assembly 100, is squeezed between the tongs 932 of a hemostat 930.

5

As shown in FIG. 32(c), the lead electrode assembly 100 and hemostat tongs 932 are introduced to the subcutaneous path 1090 and pushed through the subcutaneous path until the lead electrode assembly 100 reaches the termination point 1085 of the path. The appendage 118 of the lead electrode assembly 100 is then released from the tongs 932 of the hemostat 930. The hemostat 930 is then withdrawn from the subcutaneous path 1090.

In an alternative method, the enhanced hemostat 930 seen in FIG. 29 is used to introduce the lead electrode assembly 100 into the subcutaneous path 1090 created as discussed above. After the subcutaneous path 1090 is created, the lead electrode assembly 100 is attached to the enhanced hemostat 930 as shown in FIG. 32(d). Eyelet pin 1108 is inserted through the eyelet 301 in the fin 120 of the lead electrode assembly 100. The enhanced hemostat 930 is then used to introduce the lead electrode assembly 100 into the subcutaneous path 1090, as shown in FIG. 32(c). The lead electrode assembly 100 is then moved through the subcutaneous path 1090 until the electrode 107

reaches the end of the path 1085. The enhanced hemostat 930 is then moved until the lead electrode assembly 100 is released from the eyelet pin 940. The enhanced hemostat 930 is then withdrawn from the subcutaneous path 1090.

5

FIGS. 33(a)-33(c) illustrate an alternative embodiment of the lead electrode assembly 100. This embodiment is substantially similar to the embodiments illustrated in FIGS. 17(a)-17(g). The backing layer 130 of this embodiment, however, lacks an integrated fin tab 180. Moreover, the appendage 118 of the lead electrode assembly 100 of this embodiment comprises a rail 1100.

FIG. 33(a) illustrates the rail 1100 of the lead electrode assembly 100 of this embodiment. The rail 1100 is a member attached to the electrode 107 that can be captured by a lead electrode assembly manipulation tool and used to precisely locate the electrode 107 during its surgical implantation within the patient. The rail 1100 comprises three sections: a foundation 1105, a riser 1110 and a head 1115. The foundation 1105 is separated from the head 1115 by the riser 1125.

The foundation 1105 comprises a flat, substantially planar member, comprising a first pair of sides 1106 and a second pair

of sides 1107. The first pair of sides 1106 of the foundation 1105 are substantially linear and substantially parallel. In an alternate embodiment, the first pair of sides 1106 of the foundation 1105 are neither linear nor parallel. The length of the first pair of sides 1106 of the foundation 1105 is approximately 2 cm. In alternate embodiments, the length of the first pair of sides 1106 of the foundation 1105 ranges from approximately 2 mm to approximately 6 cm. In an alternate embodiment, the first pair of sides 1106 of the foundation 1105 are as long as the electrode 107 (not shown) of the lead electrode assembly 100 (not shown).

The second pair of sides 1107 of the foundation 1105 are substantially linear and substantially parallel. In an alternate embodiment, the second pair of sides 1107 of the foundation 1105 are neither linear nor parallel. The length of the second pair of sides 1107 of the foundation 1105 is approximately 1 cm. In alternate embodiments, the length of the second pair of sides 1107 of the foundation 1105 ranges from approximately 0.5 cm to approximately 3 cm.

The foundation 1105 further comprises a top surface 1120 and a bottom surface 1121. The foundation 1105 has a thickness, measured as the distance between the top surface 1120 and the

bottom surface 1121. The thickness of the foundation 1105 is 2 mm. In alternate embodiments, the thickness of the foundation 1105 ranges between approximately 1 mm and approximately 5 mm. -

5       Turning now to the riser 1110, the riser 1110 comprises a flat, substantially planar protrusion from the top surface 1120 of the foundation 1105 of the rail 1100. The riser comprises a first face 1125, a second face 1126, a top 1127, a bottom 1128, a proximal end 1123 and a distal end 1124. The first face 1125 and second face 1126 are parallel to each other and perpendicular to the top surface 1120 of the foundation 1105. The first face 1125 and a second face 1126 of the riser 1110 are parallel to the first pair of sides 1106 of the foundation 1105. The bottom 1128 of the riser 1110 joins the foundation 1105 in a position centered between the first pair of sides 1106 of the foundation 1105. The proximal end 1123 of the riser 1110 and the distal end 1124 of the riser 1110 are parallel to each other and perpendicular to the top surface 1120 of the foundation 1105. In other embodiments, the proximal end 1123 of the riser 1110 and the distal end 1124 of the riser 1110 are not parallel to each other.

In one embodiment, the proximal end 1123 of the riser 1110 is not perpendicular the top surface 1120 of the foundation

1105. Instead, the proximal end 1123 of the riser 1110 is sloped, so that the proximal end 1123 and the distal end 1124 of the riser 1110 are closer at the top 1127 of the riser 1110 than at the bottom 1128 of the riser. A slanted proximal end 1123  
5 make the rail 1100 of the lead electrode assembly 100 offer less resistance against the tissues of the patient during insertion into the patient.

10 The height of the riser,  $H_{\text{riser}}$ , is measured as the distance between the top surface 1120 of the foundation 1105 to the head 1115, perpendicular to the top surface 1120 of the foundation 1105. The height of the riser is approximately 5 mm. In alternate embodiments, the height of the riser ranges from approximately 1 mm to approximately 10 mm.

15 The riser 1110 has a width, measured as the distance between the first face 1125 and the second face 1126. The width of the riser 1110 is 2 mm. In alternate embodiments, the width of the riser 1110 ranges from approximately 1 mm to  
20 approximately 6 mm.

Turning now to the head 1115, the head 1115 is a flat, substantially planar member. The head 1115 comprises a first pair of sides 1136, a second pair of sides 1137, a top surface

1116 and a bottom surface 1117 (not shown). The first pair of sides 1136 and the second pair of sides 1137 of the head 1115 are substantially linear and substantially parallel. In an alternate embodiment, the first pair of sides 1136 of the head 5 1115 are neither linear nor parallel. In an alternate embodiment, the second pair of sides 1137 of the head 1115 are neither linear nor parallel.

10 The length of the first pair of sides 1136 of the head 1115 is equal to the length of the first pair of sides 1106 of the foundation 1105. In alternate embodiments, the length of the first pair of sides 1136 of the head 1115 is unequal to the length of the first pair of sides 1106 of the foundation 1105. The length of the second pair of sides 1137 of the head 1115 is approximately 5 mm. In alternate embodiments, the length of the second pair of sides 1137 of the head 1115 ranges from approximately 3 mm to approximately 10 mm.

20 The bottom surface 1117 of the head 1115 joins the top 1127 of the riser 1110 opposite the foundation 1105 of the rail 1100. The top surface 1116 and the bottom surface 1117 of the head 1115 are parallel to the top surface 1120 of the foundation 1105. In an alternate embodiment, the top surface 1116 and the

bottom surface 1117 of the head 1115 are not parallel to the top surface 1120 of the foundation 1105.

5 The head 1115 has a thickness, measured as the distance between the top surface 1116 and the bottom surface 1117 of the head 1115. The thickness of the head 1115 is approximately 2 mm. In alternate embodiments, the thickness of the head ranges between approximately 2 mm and approximately 10 mm.

10 The foundation 1105, the head 1115 and the riser 1110 are made of stainless steel. In alternate embodiments, some or all of the sections of the rail 1100 are made of metals other than stainless steel. In alternate embodiments, some or all of the sections of the rail 1100 are made of a polymeric material wherein the polymeric material is selected from the group consisting essentially of a polyurethane, a polyamide, a polyetheretherketone (PEEK), a polyether block amide (PEBA), a polytetrafluoroethylene (PTFE), a silicone and mixtures thereof.

20 The foundation 1105, the head 1115 and the riser 1110 are machined from the same piece of material. In an alternate embodiment, some or all of the sections are formed independently and welded to the others.



Turning in detail to FIG. 33(b), the position of the rail 1100 within the lead electrode assembly 100 will be discussed. The rail 1100 is positioned so that its bottom surface 1121 is adjacent to and covers a region of the first surface 131 of the backing layer 130. The rail is centered between the first side 133 and second side 134 of the backing layer 130. In an alternate embodiment, the rail is not centered between the first side 133 and second side 134 of the backing layer 130.

In an alternate embodiment, there is no backing layer 130 and the rail 1100 is positioned so that its bottom surface 1121 is adjacent to the top surface 110 of the electrode 107.

Turning now to the electrode 107 of this embodiment, the electrode 107 is the same shape and size as the electrode 107 discussed with reference to FIGS. 17(a)-(g). In alternative embodiments, the length of the first pair of sides 108 (not shown) and second pair of sides 109 (not shown) of the electrode 107 range independently between approximately 1 cm and approximately 5 cm.

Turning now to the molded cover 220, the skirt 222 of the molded cover 220 partially covers the bottom surface 115 of the electrode 107 as discussed with reference to FIG. 17(d). The

molded cover 220 further substantially covers the first surface 131 of the backing layer 130. The molded cover 220 does not cover the first surface 131 of the backing layer 220 in the region in which the bottom surface 1121 of the rail 1100 is adjacent to the backing layer 130. Instead, the molded cover 220 in this region substantially covers the top surface 1120 of the rail 1100. The molded cover 220 abuts the first face 1125 and second face 1126 of the riser 1110 of the rail 1100.

Turning to FIG. 33(c), the position of the lead 21 and the appendage 118 will now be discussed. The interface line 800 of the appendage 118 and the line of the lead 805 are the same line. In an alternate embodiment, interface line 800 of the appendage 118 and the line of the lead 805 are not the same line. The line of the lead 805 is centered between the first pair of sides 108 (phantom view) of the electrode 107 (phantom view). In an alternate embodiment, the line of the lead 805 is not centered between the first pair of sides 108 of the electrode 107.

FIG. 34 illustrates an alternative embodiment of the lead electrode assembly 100. This embodiment is substantially similar to the embodiment illustrated in FIGS. 33(a)-33(c). In this embodiment, however, the dimensions of the electrode 107

are different from those of the embodiment illustrated in FIGS.  
33(a)-33(c).

The first pair of sides 108 of the electrode 107 (phantom  
5 view) are approximately 2.4 cm in length. The second pair of  
sides 109 of the electrode 107 are approximately 4 cm in length.  
In alternative embodiments, the length of the first pair of  
sides 108 and second pair of sides 109 of the electrode 107  
range independently between approximately 1 cm and approximately  
10 5 cm.

The interface line 800 of the rail 1100 is parallel to the  
line of the lead 805. In an alternate embodiment, the interface  
line 800 of the rail 1110 is not parallel to the line of the  
15 lead 805. The interface line 800 of the rail 1100 is centered  
between the first pair of sides 108 of the electrode 107. In an  
alternate embodiment, the interface line 800 of the rail 1100 is  
not centered between the first pair of sides 108 of the  
electrode 107.

20

The line of the lead 805 is not centered between the first  
pair of sides 108 of the electrode 107. Because the lead 805 is  
not centered between the first pair of sides 108 of the  
electrode 107, the lead rail 1110 may be more easily accessed by

a lead electrode manipulation tool (not shown). In an alternate embodiment, the line of the lead 805 is centered between the first pair of sides 108 of the electrode 107.

5 FIG. 35 illustrates a lead electrode assembly manipulation tool 927 useful for manipulating a lead electrode assembly (not shown) having an appendage 118 comprising a rail 1100 during the implantation of the lead electrode assembly 100 in a patient. Examples of such lead electrode assembly 100 embodiments are shown in FIGS. 33(a)-33(c) and 34.

10 The lead electrode assembly manipulation tool 927 comprises a handle 1142, a rod 1144 and a rail fork 1146. The handle 1142 is connected to the rod 1144. The rail fork 1146 is also connected to the rod 1144.

15 The rod 1144 is a cylindrical member with a diameter of approximately 4 mm, approximately 25 cm in length, having a proximal end 1147 and a distal end 1148. The rod 1144 is curved with a radius of approximately 20 cm.

20 The rod is made of steel. In other embodiments, the rod is composed of titanium, a polymeric material or any other material suitable for this purpose.

The handle 1142 is a cylindrical member with a diameter sized to fit comfortably in the palm of a surgeon's hand. The rod is connected to the proximal end 1147 of the rod 1144. In  
5 an alternate embodiment, the handle 1142 is not cylindrical. In an alternate embodiment, the handle 1142 has ergonomic contours.

The handle is made of polyurethane. In an alternate  
10 embodiment, the handle is made of any metal, or any polymeric material suitable for this purpose.

Turning now to FIG. 35(b), the rail fork 1146 is attached  
15 to the distal end 1148 of the rod 1144. The rod further comprises a slot 1162 in its distal end. The rail fork comprises a pair of tines 1151 separated by a gap 1153 and a  
20 tine base 1160 having a tang 1161.

Each of the pair of tines 1151 has a proximal end 1154 and  
25 a distal end 1155. The proximal ends 1154 of the pair of tines 1151 are attached to the tine base 1160. Each of the pair of tines 1151 has a substantially rectangular form with straight inner sides 1156 and straight outer sides 1157. The distal ends 1155 of each of the pair of tines 1151 are rounded. The length

of the pair of tines 1151, measured from the distal end 1155 to the proximal end 1154, is substantially equal to the length of the first pair of sides 1106 of the rail 1100 of the lead electrode assembly 100. In alternate embodiments, the length of the pair of tines 1151 is substantially greater than or less than the length of the first pair of sides 1106 of the rail 1100.

The pair of tines 1151 are separated by a gap 1153 formed by the inner sides 1156 of the pair of tines 1151 and the tine base 1160.

The pair of tines 1151 and the tine base 1160 comprising the rail fork 1146 are punched from a single sheet of steel having a thickness of approximately 3 mm. In other embodiments, the rail fork 1146 is composed of titanium, a polymeric material or any other material suitable for this purpose. In one embodiment, the handle 1142, the rod 1144 and the rail fork 1146 are all made from the same piece of material.

FIG. 35(c) illustrates a side plan view of the lead electrode assembly manipulation tool 927. The rod 1144 further comprises a slot 1162 in its distal end 1148. The tine base 1160 connects the pair of tines 1151 to the distal end 1148 of

the rod 1144. The tine base 1160 comprises a tang 1161 (phantom view). The tang 1161 is inserted in the slot 1162 in the rod 1144. The tang 1161 is welded in the slot 1162 of the rod 1144.

5 We now turn to a description of the use of the lead electrode assembly manipulation tool 927 in the implantation of a lead electrode assembly 100 into a patient.

As discussed with reference to FIG. 31, an incision 905 is made in the patient 900. As discussed with reference to FIG. 32(a), a subcutaneous path 1090 is created in the patient 900 with a hemostat 932.

As shown in FIG. 35(d), the lead electrode assembly 100 is then captured by the lead electrode assembly manipulation tool 927. The rail 1110 of the lead electrode assembly 100 is inserted into the rail fork 1146 of the lead electrode assembly manipulation tool 927. The riser 1110 (phantom view) of the rail is placed into the gap 1153 between the pair of tines 1151 of the rail fork 1146. The pair of tines 1151 fit between the bottom surface 1117 of the head 1115 of the rail 1100 and the molded cover 220. The rail 1100 is slid toward the proximal end 1155 of the pair of tines 1151 until the riser 1110 of the rail 1100 reaches the tine base 1160 of the rail fork 1146. The lead

21 of the lead electrode assembly 100 can then be pulled in toward the handle 1142 of the lead electrode assembly manipulation tool 927 until it is taught. This acts to prevent the rail 1100 of the lead electrode assembly 100 from sliding 5 toward the distal end 1151 of the pair of tines 1151 of the rail fork 1146.

As discussed with reference to FIG. 32(c), the lead electrode assembly manipulation tool 927 may then be used to place the lead electrode assembly 100 into the incision 905 of the patient 900 and used to move the electrode 107 to the termination point 1085 of the subcutaneous path 1090.

The lead electrode assembly 100 is then released from the lead electrode assembly manipulation tool 927. To achieve this, the lead 21 of the lead electrode assembly 100 is released so that the pair of tines 1151 of the rail fork 1146 of the lead electrode assembly manipulation tool 927 can slide relative to the rail 1100 of the lead electrode assembly 100. The lead 20 electrode assembly manipulation tool 927 may then be extracted from the subcutaneous path 1090, leaving the lead electrode assembly 100 behind.



FIGS. 36(a)-36(b) illustrate an alternative embodiment of the lead electrode assembly 100. This embodiment is substantially similar to the embodiments illustrated in FIGS. 17(a)-17(g). The backing layer 130 of this embodiment, however, lacks an integrated fin tab 180. Moreover, the lead electrode assembly 100 of this embodiment further comprises a pocket 1300.

FIG. 36(a) illustrates a cross-sectional side plan view of this embodiment. The pocket 1300 comprises a layer of material 1315 and stitching 360. The pocket further comprises an interior 1305 and an opening 1310. The layer of material 1315 is attached to the molded cover 220 with the stitching 360. The molded cover 220 is, in turn, attached to the electrode 107.

The molded cover 220 comprises an outer surface 1330 and a top surface 1331. The outer surface 1330 of the molded cover 220 is the surface of the molded cover 220 that does not lie adjacent to the backing layer 131 or the electrode 107. The top surface 1331 of the molded cover 220 faces away from, and parallel to the electrode 107.

The layer of material 1315 of the pocket 1300 comprises an inner face 1316 and an outer face 1317. The layer of material 1315 is attached to the top surface 1331 of the molded cover 220

so that the inner face 1316 of the layer of material 1315 faces the top surface 1331 of the molded cover 220. The inner face 1316 of the layer of material 1315 also faces the top surface 110 of the electrode 107.

5

The layer of material 1315 is made of polyurethane. In other embodiments, the layer of material 1315 is made of any bio-compatible material suitable for this purpose. In other embodiments, the layer of material 1315 is made of any bio-compatible polymeric material.

The stitching 360 fastening the layer of material 1315 to the top surface 1331 of the molded cover 220 is comprised of nylon. In alternate embodiments, the stitching 360 comprises any polymeric material.

FIG. 36(b) illustrates a top plan view of the lead electrode assembly 100 of FIG. 36(a). The top surface 1331 of the molded cover 220 has a first side 1333, a second side 1334, a distal end 1336, a proximal end 1337, a length and a width.

The distal end 1336, proximal end 1337, first side 1333 and second side 1334 of the top surface 1331 of the molded cover 220 are positioned substantially over the distal end 137 (phantom

view), proximal end 138 (phantom view), first side 133 (not shown) and second side 134 (not shown) of the backing layer 130 (phantom view) respectively.

5       The width of the top surface 1331 of the molded cover 220  
is measured as the distance between the first side 1333 and  
second side 1334 of the back surface. The length of the top  
surface 1331 of the molded cover is measured as the distance  
between the distal end 1336 and proximal end 1337 of the molded  
10 cover 220.

10 9 8 7 6 5 4 3 2 1

The layer of material 1315 comprises a periphery 1318 and a middle portion 1319. More particularly, the layer of material 1315 comprises a distal end 1320, a proximal end 1321, a first side 1322 and a second side 1323. The periphery 1318 of the layer of material 1315 comprises the distal end 1320, the proximal end 1321, the first side 1322 and the second side 1323 of the layer of material 1315. The middle portion 1319 of the layer of material 1315 comprises the area between the distal end 1320, the proximal end 1321, the first side 1322 and the second side 1323 of the layer of material 1315.

The pocket 1300 formed by the layer of material 1315 further comprises a bounded region 1325 and a center 1326. The

bounded region 1325 of the pocket 1300 is attached to the back  
face 1317 of the molded cover 220. The center 1326 of the  
pocket 1300 is not attached to the back face 1317 of the molded  
cover 220. Stitching 360 in the bounded region 1325 is used to  
5 attach the layer of material 1315 to the molded cover 220.

10  
09940356-082701  
18280-95504660  
In the embodiment under discussion, the bounded region 1325  
of the pocket 1300 comprises a portion of the periphery 1318 of  
the layer of material 1315. The bounded region 1325 of the  
pocket 1300 comprises the proximal end 1321, the first side 1322  
and the second side 1323 of the layer of material 1315. In this  
embodiment, the bounded region 1325 of the pocket 1300 does not  
comprise the distal end 1320 of the layer of material 1315. The  
center 1326 of the pocket 1300 comprises the middle portion 1319  
of the layer of material 1315. The bounded region 1325 is  
curved around the center 1326 of the pocket 1300 in a "U" shape.  
The bounded region 1325 of the pocket 1300 does not completely  
enclose the center 1326 of the pocket 1300.

20 In this embodiment, the bounded region 1325 of the pocket  
comprises a contiguous portion of the periphery 1318 of the  
layer of material 1315. In an alternate embodiment, the bounded  
region 1325 of the pocket comprises a plurality of segmented  
portions of the periphery 1318 of the layer of material 1315.

In an alternate embodiment the bounded region 1325 of the pocket 1300 does not comprise any portion of the periphery 1318 of the layer of material 1315. In alternate embodiments, the bounded region 1325 comprises any shape that could be traced on the layer of material 1315 that partially encloses a center 1326. In one embodiment, the bounded region 1325 of the pocket 1300 is a portion of a circle's circumference (not shown) that does not touch the periphery 1318 of the layer of material 1315. The center 1326 is the area inside the circle.

In an alternate embodiment, the pocket 1300 comprises a sheet of molded silicone. The molded silicone is fused to the molded cover 220 in the bounded region 1325.

The opening 1310 of the pocket 1300 comprises the area between the distal end 1320 of the layer of material 1315 and the top surface 1331 of the molded cover 220. The interior 1305 of the pocket 1300 comprises the area between the middle portion 1319 of the layer of material 1315 and the top surface 1331 of the molded cover 220.

The layer of material 1315 is positioned so that its first side 1322 and second side 1323 are positioned over the first

side 1333 and second side 1334 of the top surface 1331 of the  
molded cover 220 respectively. The layer of material 1315 is  
positioned so that its proximal end 1321 is positioned over the  
proximal end 1337 of the top surface 1331 of the molded cover  
5 220.

The layer of material 1315 is sized so that its length is  
shorter than the length of the top surface 1331 of the molded  
cover 220. In alternate embodiments, the layer of material 1315  
10 is sized so that its length is equal to, or longer than the  
length of the top surface 1331 of the molded cover 220.

The proximal end 1321 of the layer of material 1315 is  
sized so that its width is substantially equal to the width of  
15 the proximal end 1337 of the top surface 1331 of the molded  
cover 220. The layer of material 1315 is sized so that its  
width steadily increases toward its distal end 1320.

The first side 1318 of the distal end 1320 of the layer of  
20 material 1315 is fastened to the first side 1333 of the top  
surface 1331 of the molded cover 220. The second side 1323 of  
the distal end 1320 of the layer of material 1315 is fastened to  
the second side 1334 of the top surface 1331 of the molded cover  
220.

5 the molded cover 220 to form the interior 1305 of the pocket  
1300.

10  
15

20 illustrated in FIGS. 36(a)-36(b). The backing layer 130 of this embodiment, however, further comprises a fin 120 positioned in the interior 1305 of the pocket 1300. The fin 120 of this embodiment is substantially similar to the fin 120 of the embodiment illustrated in FIG. 17(b).

The fin 120 comprises an integrated fin tab 180 formed on the backing layer 130. The molded cover 220 covers the integrated fin tab 180 to form the fin 120. The integrated fin tab 180 has a slope-shaped proximal edge 183. The sloped-shape of the resulting fin 120 permits a the fin 120 to fit deeply into the interior 1305 of the pocket 1300. The hood can act to reduce the resistance presented by the tissues of the patient against the fin 120 and any tool used to grasp the fin 120 during insertion of the lead electrode assembly 100. Such a hood can be placed over any fin discussed in the specification to perform this function or any other function.

In alternate embodiments, appendages other than a fin are positioned between the pocket 1300 and the electrode 107, in the interior 1305 of the pocket 1300. In one embodiment, a loop such as that discussed with reference to FIGS. 21(a)-21(c) is positioned in the interior 1305 of the pocket 1300. In another embodiment, a tube such as that discussed with reference to FIG. 26 is positioned in the interior 1305 of the pocket 1300.

FIG. 37(a) and 37(b) illustrates an alternate embodiment of the lead electrode assembly 100. This embodiment is



substantially similar to the embodiment illustrated in FIGS.  
36(a)-36(b).

FIG. 37(a) illustrates a bottom plan view of the lead  
5 electrode assembly 100 of this embodiment. In this embodiment,  
the electrode 107 is thumbnail shaped.

FIG. 37(b) illustrates a top plan view of the lead  
electrode assembly 100 of this embodiment. The top surface 1331  
10 of the molded cover 220 is shaped to accommodate the thumbnail  
shaped electrode 107.

TO 2580-95E0456

Like the embodiment discussed with reference to FIGS. 36(a)  
and 36(b), the pocket 1300 comprises a layer of material 1315.  
In this embodiment, however, the layer of material 1315 has a  
roughly triangular shape. The layer of material 1315 comprises  
a periphery 1318 and a middle portion 1319. More particularly,  
the layer of material comprises a first side 1340, a second side  
1341 and a third side 1342 of the layer of material 1315. The  
20 periphery 1318 of the layer of material comprises the first side  
1340, the second side 1341 and the third side 1342 of the layer  
of material 1315. The middle portion 1319 of the layer of  
material 1315 comprises the area between the first side 1340,

the second side 1341 and the third side 1342 of the layer of material 1315.

In this embodiment, the bounded region 1325 of the pocket 1300 comprises a portion of the periphery 1318 of the layer of material 1315. The bounded region 1325 of the pocket 1300 comprises the first side 1340 and the second side 1341 of the layer of material 1315. The center 1326 of the pocket 1300 comprises the middle portion 1319 of the layer of material 1315. The opening 1310 of the pocket 1300 comprises the third side 1342 of the layer of material 1315 and the top surface 1331 of the molded cover 220. The bounded region 1325 of the pocket 1300 is curved around the center 1326 of the pocket 1300. The bounded region 1325 of the pocket 1300 does not completely enclose the center 1326.

In this embodiment, the bounded region 1325 of the pocket comprises a contiguous portion of the periphery 1318 of the layer of material 1315. In an alternate embodiment, the bounded region 1325 of the pocket comprises a plurality of segmented portions of the periphery 1318 of the layer of material 1315.

In an alternate embodiment the bounded region 1325 of the pocket 1300 does not comprise any portion of the periphery 1318 of the layer of material 1315.

5        FIG. 38(a)-38(c) illustrates a lead electrode assembly manipulation tool 927. The lead electrode assembly manipulation tool 927 illustrated is useful for manipulating a lead electrode assembly 100 having a pocket 1300 during the implantation of the lead electrode assembly 100 in a patient. Examples of such a  
10 lead electrode assembly 100 embodiments are shown in FIGS. 36(a), 36(b), 37(a) and 37(b).

15        FIG. 38(a) is a top view of the lead electrode assembly manipulation tool 927 of this embodiment. The lead electrode assembly manipulation tool 927 comprises a handle 1142 (not shown), a rod 1144 and a paddle 1350.

20        The rod 1144 and handle 1142 are substantially similar to the rod 1144 and handle 1142 of the lead electrode assembly manipulation tool 927 illustrated in FIGS. 35(a)-35(d). The handle 1142 is connected to the rod 1144.

The paddle 1350 is attached to the distal end 1148 of the rod 1144. The paddle 1350 comprises a disk 1351 and a tang 1161 (phantom view).

5        FIG. 38(b) is a side view of the lead electrode assembly manipulation tool 927 of this embodiment. The tang 1161 is inserted in the slot 1162 in the rod 1144. The tang 1161 is welded into the slot 1162 of the rod 1144.

10        The disk 1351 and the tang 1161 are punched from a single sheet of steel having a thickness of approximately 3 mm. In other embodiments, the disk 1351 and tang 1161 are composed of titanium, a polymeric material or any other material suitable for this purpose. In one embodiment, the handle 1142, the rod 1144 and the paddle 1350 are all made from the same piece of material.

15        We now turn to FIG. 38(c) for a description of the use of the lead electrode assembly manipulation tool 927 in the  
20        implantation of a lead electrode assembly 100 into a patient.

As discussed with reference to FIG. 31, an incision 905 is made in the patient 900. As discussed with reference to FIG.

32(a), a subcutaneous path 1090 is created in the patient 900 with a hemostat 932.

The lead electrode assembly 100 is then captured by the lead electrode assembly manipulation tool 927. The paddle 1350 of the lead electrode assembly manipulation tool 927 is inserted into the pocket 1300 of the lead electrode assembly 100. The paddle 1350 is slid into the interior 1305 of the pocket via the opening 1310 of the pocket until it can go no further. At this point, the paddle 1350 touches the inner surface 1316 of the proximal end 1321 of the layer of material 1315.

The lead 21 of the lead electrode assembly 100 can then be pulled toward the handle 1142 of the lead electrode assembly manipulation tool 927 until it is taught. This acts to prevent the paddle 1350 of the lead electrode assembly manipulation tool 927 from sliding out of the pocket 1300 of the lead electrode assembly 100.

The lead electrode assembly manipulation tool 927 may then be used to place the lead electrode assembly 100 into the incision 905 of the patient as seen in FIG. 31. The lead electrode assembly manipulation tool 927 may then be used to move the electrode 107 to the termination point 1085 of the

subcutaneous path 1090 created as discussed with reference to FIG. 32(c).

The lead electrode assembly 100 is then released from the lead electrode assembly manipulation tool 927. To achieve this, the lead 21 of the lead electrode assembly 100 is released so that the paddle 1350 can slide relative to the pocket 1300 of the lead electrode assembly 100. The lead electrode assembly manipulation tool 927 may then be extracted from the subcutaneous path 1090 leaving the lead electrode assembly 100 behind.

Alternately, a curved hemostat, such as the hemostat 930 discussed with reference to FIG. 32(b) could be inserted in the pocket 1300 of the lead electrode assembly 100. The hemostat could then be used to move the electrode 107 to the termination point 1085 of the subcutaneous path 1090 as discussed above.

Alternately, a curved hemostat, such as the hemostat 930 discussed with reference to FIG. 32(b) could be used to grip the pocket 1300 of the lead electrode assembly 100, and used to move the electrode 107 to the termination point 1085 of the subcutaneous path 1090 as discussed above.

FIGS. 39(a)-39(b) illustrate an alternative embodiment of the lead electrode assembly 100. This embodiment is substantially similar to the embodiment illustrated in FIGS. 38(a)-38(c). The backing layer 130 of this embodiment, however, lacks a pocket 1300. Moreover, the lead electrode assembly 100 of this embodiment further comprises a first channel guide 1401 and a second channel guide 1402.

FIG 39(a) illustrates a cross-sectional rear plan view of the lead electrode assembly 100 of this embodiment. The first channel guide 1401 and a second channel guide 1402 each have an interior 1403 and an opening 1404.

The first channel guide 1401 and the second channel guide 1402 each comprise a strip of material 1406 attached to the molded cover 220.

The strip of material 1406 comprising the first channel guide 1401 is substantially rectangular in shape. The strip of material 1406 comprises a first side 1410 and a second side 1412. The first side 1410 and the second side 1412 of the strip of material 1406 are parallel to each other. In another embodiment, the first side 1410 of the strip of material 1406 is not parallel to the second side 1412.

The strip of material 1406 further comprises an inner surface 1417 and a outer surface 1416. The strip of material is positioned so that the inner surface 1417 of the first side 1410  
5 faces the outer surface 1330 of the molded cover 220. The first side 1410 of the strip of material is attached to the first side 1333 of the top surface 1331 of the molded cover 220. The second side 1412 of the strip of material 1406 is attached to the skirt 222 of the molded cover 220.

The interior 1403 of the first channel guide is formed between the inner face 1417 of the strip of material 1406 and the outer surface 1330 of the molded cover 220.

The second channel guide is formed in substantially the same way on the second side 1334 of the molded cover 220.

FIG. 39(b) illustrates a top plan view of the lead electrode assembly of the embodiment of FIG. 39(a). The strip  
20 of material 1406 comprising the first channel guide 1401 is substantially rectangular in shape having a distal end 1413 and a proximal end 1414. The distal end 1413 and the proximal end 1414 of the strip of material 1406 are parallel to each other. In another embodiment, the distal end 1413 of the strip of



material 1406 is not parallel to the proximal end 1414 of the strip of material 1406.

The opening 1404 of the first channel guide 1401 is formed by the distal end 1413 of the strip of material 1406 and the outer surface 1330 of the molded cover 220.

The first side 1410 and the second side 1412 (not shown) of the strip of material 1406 comprising the first channel guide 1401 are positioned so that they lie parallel to the first side 1333 (phantom view) of the molded cover 220.

The second channel guide 1402 is formed and mounted to the lead electrode assembly 100 in substantially the same way as the first channel guide 1401. The first side 1410 and the second side 1412 (not shown) of the strip of material 1406 comprising the second channel guide 1402 are positioned so that they lie parallel to the second side 1333 (phantom view) of the molded cover 220.

The strips of material 1406 are composed of polyurethane. In an alternate embodiment, the strips of material 1406 are composed of any polymeric material. The strips of material 1406 are fastened to the molded cover 220 with stitching 360.

In an alternate embodiment, the strips of material 1406 are made of molded silicone and attached to the molded cover 220 by fusing them to the molded cover 220. In an alternate embodiment, the first channel guide 1401 and the second channel guide 1402 are formed as part of the molded cover 220.

FIG. 40(a)-40(b) illustrates a lead electrode assembly manipulation tool 927. The lead electrode assembly manipulation tool 927 illustrated is useful for manipulating a lead electrode assembly 100 having a first channel guide 1401 and a second channel guide 1402 during the implantation of the lead electrode assembly 100 in a patient. Examples of such a lead electrode assembly 100 embodiments are shown in FIGS. 39(a)-39(b).

FIG. 40(a) illustrates a top plan view of a lead electrode assembly manipulation tool 927. The lead electrode assembly manipulation tool 927 in this embodiment comprises a handle 1142 (not shown), a rod 1144 and a channel guide fork 1446.

The rod 1144 and handle 1142 are substantially similar to the rod 1144 and handle 1142 of the lead electrode assembly manipulation tool 927 illustrated in FIGS. 35(a)-35(d). The handle 1142 is connected to the rod 1144.

The channel guide fork 1446 is attached to the distal end 1148 of the rod 1144. The channel guide fork 1446 comprises a pair of tines 1451 separated by a gap 1455 and a tine base 1450  
5 having a tang 1161.

The pair of tines 1451 each have a proximal end 1452 and a distal end 1453. The proximal ends 1452 of the pair of tines 1451 are attached to the tine base 1450. The pair of tines 1451  
10 have a substantially cylindrical form. The distal end 1453 of each of the pair of tines 1451 is rounded.

The length of the pair of tines 1451 is substantially equal to the length of the first side 1410 of the strips of material 1406 comprising the first channel guide 1401 and second channel guide 1402. In alternate embodiments, the length of the tines 1451 is substantially greater than or less than the length of the first side 1410 of the strips of material 1406 comprising the first channel guide 1401 and second channel guide 1402.  
15

20

The tines are separated by a gap 1455 between the proximal ends 1452 of the pair of tines 1451. The pair of tines 1451 are substantially straight and substantially parallel to each other.

The tine base 1450 connects the pair of tines 1451 to the distal end 1148 of the rod 1144. The tine base 1450 comprises a tang 1161 (phantom view). The tang 1161 is inserted in a slot 1162 in the rod 1144. The tang 1161 is welded in the slot 1162  
5 of the rod 1144.

10 The pair of tines 1451 comprising the channel guide fork 1446 are composed of steel and have a diameter of approximately 3 mm. The tine base 1450 comprising the channel guide fork 1446 is punched from a single strip of steel having a thickness of approximately 3 mm. The pair of tines 1451 are welded to the tine base 1450.

15 In other embodiments, the channel guide fork 1446 is composed of metal, a polymeric material, or any other material suitable for this purpose. In one embodiment, the handle 1142, the rod 1144 and the channel guide fork 1446 are all made from the same piece of material.

20 We now turn to FIG. 40(b) for a description of the use of the lead electrode assembly manipulation tool 927 in the implantation of a lead electrode assembly 100 into a patient.

As discussed with reference to FIG. 31, an incision 905 is made in the patient 900. As discussed with reference to FIG. 32(a), a subcutaneous path 1090 is created in the patient 900 with a hemostat 932.

5

The lead electrode assembly 100 is then captured by the lead electrode assembly manipulation tool 927. The pair of tines 1451 of the lead electrode assembly manipulation tool 927 is inserted into the openings 1404 in the first channel guide 1401 and second channel guide 1402.

The electrode 107 is placed into the gap 1455 between the tines of the channel guide fork 1446. The tines 1451 fit into the interior 1403 of the first channel guide 1401 and second channel guide 1402. The molded cover is slid toward the proximal end 1452 of the tines until it can go no further. The lead 21 of the lead electrode assembly 100 can then be pulled in toward the handle 1142 of the lead electrode assembly manipulation tool 927 until it is taught. This acts to prevent the lead electrode assembly 100 from sliding toward the distal end 1453 of the pair of tines 1451 of the channel guide fork 1446.

The lead electrode assembly manipulation tool 927 may then be used to place the lead electrode assembly 100 into the incision 905 of the patient as seen in FIG. 31. The lead electrode assembly manipulation tool 927 may then be used to move the electrode 107 through the termination point 1085 of the subcutaneous path 1090 created as discussed with reference to FIG. 32(c).

The lead electrode assembly 100 is then released from the lead electrode assembly manipulation tool 927. To achieve this, the lead 21 of the lead electrode assembly 100 is released so that the pair of tines 1451 of the channel guide fork 1446 of the lead electrode assembly manipulation tool 927 can slide relative to the first channel guide 1401 and second channel guide 1402 of the lead electrode assembly 100. The lead electrode assembly manipulation tool 927 may then be extracted from the subcutaneous path 1090 leaving the lead electrode assembly 100 behind.

FIG. 41(a) illustrates a subcutaneous implantable cardioverter-defibrillator kit 1201 of the present invention. The kit comprises a group of items that may be used in implanting a S-ICD system in a patient. The kit 1201 comprises a group of one or more of the following items: an S-ICD canister

11, a lead electrode assembly 100, a hemostat 1205, a lead electrode assembly manipulation tool 927, a medical adhesive 1210, an anesthetic 1215, a tube of mineral oil 1220 and a tray 1200 for storing these items.

5

In one embodiment, the S-ICD canister 11 is the S-ICD canister 11 seen in, and discussed with reference to FIG. 1.

10 The lead electrode assembly 100 is the lead electrode assembly 100 with a rail 1100, and discussed with reference to FIGS. 33(b) and 33(c). In alternate embodiments, the lead electrode assembly 100 is any lead electrode assembly 100 including an electrode 107 with an appendage 118; a pocket; or a first and second channel guide for positioning the electrode 107 during implantation.

15  
20 The hemostat 1205 is a curved hemostat made of steel having a first end 1240 and a second end 1241. The hemostat 1205 has a length, measured between the first end 1240 and the second end 1241 as shown in FIG. 41(b) by dimension  $L_{\text{Hemostat}}$ . The length of the hemostat 1205,  $L_{\text{Hemostat}}$ , is approximately 75 cm. In an alternate embodiments, the hemostat 1205 is a length other than 75 cm. In an alternate embodiment, the hemostat 1205 is the

enhanced hemostat seen in, and discussed with reference to FIG.  
31.

The lead electrode assembly manipulation tool 927 is the  
5 lead electrode assembly manipulation tool 927 with a rail fork  
1146. In alternate embodiments, the lead electrode assembly  
manipulation tool 927 is any lead electrode assembly  
manipulation tool 927 including a paddle or a channel guide  
fork.

10  
The medical adhesive 1210 comprises a roll of clear, 1-inch  
wide medical adhesive tape. As will be recognized, the medical  
adhesive could be a liquid adhesive, or any other adhesive  
substance.

15  
The anesthetic 1215 is a one ounce tube of lidocaine gel.  
This can be used as a local anesthetic for the introduction of  
the lead electrode assembly 100 as discussed below. As will be  
recognized, the anesthetic could be any substance that has a  
20 pain-killing effect. Alternatively, one could use an injectable  
form of anesthetic inserted along the path of the lead.



The tube of mineral oil 1220 is a one ounce tube of mineral oil. This can be used for oiling parts of the electrode connector block 17 seen in FIG. 1.

5 The tray 1200 is a box sized to fit the items of the kit 1201. The tray 1200 is composed of molded plastic. In another embodiment, the tray 1200 is a cardboard box. One skilled in the art will recognize that the tray 1200 may comprise any container capable of containing the items of the kit. In one  
10 embodiment, the tray is formed with recessed partitions 1230 that generally follow the outline of the items of the kit 1201 to be stored in the tray. In one embodiment, the tray 1200 has packaging material 1225 disposed over it, wherein the packing  
15 material 1225 provides a sanitary cover for the items of the kit 1201. The packaging material 1225 further acts to contain the items of the kit 1201.

In an alternate embodiment the kit 1201 comprises ten lead  
20 electrode assemblies 100 each comprising a lead 21 having a lead length,  $l_{\text{Lead}}$ , different from the others. In one embodiment, the lead lengths range between approximately 5 cm and approximately 52 cm with approximately a 10 cm difference between the lead length of each lead electrode assembly 100.

In an alternative embodiment, the kit 1201 comprises an S-ICD canister 11, a hemostat 1205 and an assortment of lead electrode assemblies 100 each comprising a lead 21 having a lead length,  $l_{\text{Lead}}$ , different from the others.

5

In one embodiment, the kit 1200 further comprises a tray 1201 and an assortment of lead electrode assemblies 100, each with an electrode 107 curved at a radius  $r$  different from the others.

In another embodiment, the kit 1200 includes components sized for surgery on a patient of a particular size. A kit 1200 for a 10 year old child, for example, includes an S-ICD canister 11 with a length of approximately 10 cm, a lead electrode assembly 100 with a lead length,  $L_{\text{Lead}}$  of approximately 12 cm and a radius  $r$  of approximately 10 cm and hemostat 1205 with a hemostat length,  $L_{\text{Hemostat}}$ , of approximately 12 cm.

The S-ICD device and method of the present invention may be embodied in other specific forms without departing from the teachings or essential characteristics of the invention. The described embodiments are therefore to be considered in all respects as illustrative and not restrictive, the scope of the invention being indicated by the appended claims rather than by

the foregoing description and all changes which come within the meaning and range of equivalency of the claims are therefore to be embraced therein.

00940356-002701  
FDZ230-95E04660